



Securing Microsoft Azure with Qualys

October 30, 2023

Copyright 2020-2022 by Qualys, Inc. All Rights Reserved.

Qualys and the Qualys logo are registered trademarks of Qualys, Inc. All other trademarks are the property of their respective owners.

Qualys, Inc.
919 E Hillsdale Blvd
4th Floor
Foster City, CA 94404
1 (650) 801 6100



Table of Contents

About This Guide	5
About Qualys	5
Qualys Support	5
Introduction.....	6
Qualys Integrated Security Platform	6
Pre-requisites	7
Automate Asset Inventory.....	9
Deploying Azure Connector	9
Pre-requisites	9
Creating Azure Connector	9
Set up Authentication Details	10
How Does Azure Connector Work?	14
Azure Metadata	15
AssetView Connector & Qualys Cloud Agent Metadata	15
Scanner Metadata	16
Azure APIs Used by Azure Connector to Discover Assets	17
Resource Groups - List	17
Virtual Machines - List	17
Qualys APIs for Azure Connectors	18
Scanning in Azure Environments.....	19
Single VNet Single Region	19
Single VNet Single Region Multiple Scanners	20
Multiple VNet Single Region	21
Multiple VNet Multiple Region	22
Non Peered VNets	23
Deploying Sensors.....	25
Deploying Scanners in Azure Platform	25
Cost and Licenses	25
Deployment Recommendations for Scanners	26
What do I Need?	27
Deploying Qualys Scanner Appliance	27
Deploying Scanners in Private Cloud Platform	36
Deploying Qualys Scanners (using CLI)	36
Using Azure GUI to Create Qualys Image and Deploy Scanner	39
Deploying Qualys Cloud Agent	43
Deploy Qualys Cloud Agent from Microsoft Defender for Cloud	43

Embedding Qualys Cloud Agent as a part of Golden Machine Image	57
Deploy Qualys Cloud Agent via Azure ARM Template	57
Deploy Qualys Cloud Agent via Other Tool Sets	57

Scan Assets 60

Azure Scan Checklist	60
Tips and Best Practices	65
Internal Scanning using Virtual Scanner Appliance	65
Internal Network Scanning using Qualys Cloud Agent	68
Perimeter Scanning using Qualys External Scanners	69
Cloud Security Posture Management	73
Cloud Inventory	73
Cloud Security Assessment	74
Securing Web Applications	76
Securing Containers	77
Deploying Container Sensor	78

Analyze, Report & Remediate..... 80

How to Query Azure Assets	80
View Asset Details Anytime	81
Save Query	81
Download and Export Results	82
Create Widget	82
Creating Reports	83
Dynamic Tagging Using Azure Attributes	84

Manage Assets Using Qualys 85

Setting up Qualys Configurations	85
--	----

Common Questions..... 88

About This Guide

Welcome to Qualys Cloud Platform and security scanning in the Cloud! We'll help you get acquainted with the Qualys solutions for scanning your Cloud IT infrastructure using the Qualys Cloud Security Platform.

About Qualys

Qualys, Inc. (NASDAQ: QLYS) is a pioneer and leading provider of cloud-based security and compliance solutions. The Qualys Cloud Platform and its integrated apps help businesses simplify security operations and lower the cost of compliance by delivering critical security intelligence on demand and automating the full spectrum of auditing, compliance and protection for IT systems and web applications.

Founded in 1999, Qualys has established strategic partnerships with leading managed service providers and consulting organizations including Accenture, BT, Cognizant Technology Solutions, Deutsche Telekom, Fujitsu, HCL, HP Enterprise, IBM, Infosys, NTT, Optiv, SecureWorks, Tata Communications, Verizon and Wipro. The company is also a founding member of the [Cloud Security Alliance \(CSA\)](#). For more information, please visit www.qualys.com

Qualys Support

Qualys is committed to providing you with the most thorough support. Through online documentation, telephone help, and direct email support, Qualys ensures that your questions are answered in the fastest time possible. We support you 7 days a week, 24 hours a day. Access support information at www.qualys.com/support/

Introduction

Welcome to Qualys Cloud Platform that brings you solutions for securing your Cloud IT Infrastructure as well as your traditional IT infrastructure. In this guide we'll be talking about securing your assets in Microsoft Azure infrastructure using Qualys.

Qualys Integrated Security Platform

With Qualys Cloud Platform you get a single view of your security and compliance - in real time. If you're new to Qualys we recommend you to visit the [Qualys Cloud Platform](#) web page to know more about our cloud platform.

ASSET MANAGEMENT	IT SECURITY	COMPLIANCE	CLOUD / CONTAINER SECURITY	WEB APP SECURITY
Global AssetView - It's Free! Unlimited Assets	Vulnerability Management, Detection & Response - Most Popular	Policy Compliance	Cloud Inventory	Web App Scanning
CyberSecurity Asset Management - New	Threat Protection	Security Configuration Assessment	Cloud Security Assessment	Web App Firewall
Certificate Inventory	Continuous Monitoring	PCI Compliance	Container Security	
	Patch Management	File Integrity Monitoring		
	Endpoint Detection & Response - New	Security Assessment Questionnaire		

Azure Cloud Terminologies

Microsoft Azure - The Microsoft cloud platform, a growing collection of integrated services including Infrastructure as a Service (IaaS) and Platform as a Service (PaaS) offerings.

[Learn more](#)

Azure Resource Manager - Azure Resource Manager enables you to work with the resources in your infrastructure solution as a group. You can deploy, update, or delete all the resources for your solution in a single, coordinated operation. You use a template for deployment and that template can work for different environments such as testing, staging, and production. [Learn more](#)

Resource Group - A container that holds related resources for an Azure solution. The resource group can include all the resources for the solution, or only those resources that you want to manage as a group. You decide how you want to allocate resources to resource groups based on what makes the most sense for your organization. [Learn more](#)

Resource Manager Template - A JavaScript Object Notation (JSON) file that defines one or more resources to deploy to a resource group. It also defines the dependencies between the deployed resources. The template can be used to deploy the resources consistently and repeatedly. [Learn more](#)

Microsoft Azure Cloud Computing Terms - Microsoft Azure portal has a dictionary of common cloud computing terms relevant to their cloud based services. This is especially useful if you are new to Microsoft Azure. [Learn more](#)

Securing Azure Essentials - IaaS and PaaS

Qualys integrates with Microsoft Azure Resource Manager (ARM) to discover assets using a Microsoft ARM API. This integration automatically detects and synchronizes changes to virtual machine instance inventories within Azure Cloud Platform. Virtual machines are tracked by virtual machine Id within Qualys even as their IP addresses change over time.

Pre-requisites

- **Qualys Applications:** Vulnerability Management (VM), Policy Compliance (PC) or Security Configuration Assessment (SCA), Cloud Agent (CA)
- **Qualys Sensors:** Virtual Scanner Appliances, Cloud Agents, as desired
- **Qualys Virtual Scanner Appliance:** Virtual machine must be able to reach the Qualys Cloud Platform over HTTPS port 443
- **Scanner personalization code (14 digits) used to deploy Virtual Scanner Appliance:** This is obtained from your Qualys account as described in [Add New Virtual Scanner in Qualys](#)
- **Qualys user account:** Must have Manager or Unit Manager role

It's easy to get started

You might already be familiar with Qualys Cloud Suite, its features and user interface. Here are the links to video libraries -

[Vulnerability Management](#)
[Policy Compliance](#)
[TotalCloud](#)
[Web Application Scanning](#)
[Cloud Agent](#)
[Integrate Qualys into Microsoft Defender for Cloud](#)

Here are the links for some helpful resources -

[Qualys Training](#) | Free self paced classes, video series, online classes
[Qualys Documentation](#) | Getting started guides, quick references, API docs
[Qualys Community](#) | Learn from the Project Managers, Subject Matter Experts and other Qualys customers
[Qualys Blog](#) | Get latest updates and Helpful hints

Quick Steps: Securing Azure

Here's the user flow for securing Azure using Qualys.

- 1 Automate Asset Inventory**
Sync inventory and metadata for an Azure virtual machine by setting up AssetView Azure Connector
- 2 Design Sensor Deployment Strategies**
Analyze Environment and deployment strategies for Cloud Agent and Virtual Scanner Appliance
- 3 Deploy Sensors**
Install Scanner Appliance and/or Cloud Agents
- 4 Scan Assets**
Launch scans targeting all assets or specific assets you're interested in
- 5 Analyze, Report & Remediate**
View dynamic dashboards, create custom widgets and run reports
- 6 Cloud Inventory and Security Assessment**
Continuously inventory and assess your Azure cloud workloads
- 7 Securing Containers**
Identify Container Hosts, Registries, and CICD Pipelines and Deploy Container Sensors
- 8 Securing Web Applications**
Configure Qualys Web Application Scanning to scan your applications

Automate Asset Inventory

Deploying Azure Connector

Configure Microsoft Azure connectors for gathering resource information from your Microsoft Azure account. You can create Azure Connector from AssetView and TotalCloud which is explained after pre-requisites. It just takes a couple of minutes.

Let us see what permissions are needed to create Azure connector.

Pre-requisites

Before you create an Azure connector, ensure that you have the following permissions:

- [Assign Azure Active Directory permissions](#) to register an application with your Azure Active Directory
- [Checking Azure Subscription Permissions](#) to assign the application to a role in your Azure subscription

Assign Azure Active Directory permissions

If your account is assigned to the User role, but the app registration setting is restricted to admin users, you are not permitted to register new apps. In such case, ask your administrator to assign you to enable users to register apps.

Checking Azure Subscription Permissions

Refer to the [Azure documentation](#) to ensure you have the required Azure subscription permissions.

Creating Azure Connector

- 1) Login to the Qualys Cloud Platform and pick the Connector app. Click **Microsoft Azure Connectors** > **Create Connector** and our wizard walks you through the steps.
- 2) Enter a name and description (optional) for your connector.
- 3) Select the applications to be associated with the connector: Cloud Security Posture Management and/or AssetView

The screenshot shows the 'Create Connector: Microsoft Azure' interface. On the left, a sidebar lists five steps: 1. Basic Details (selected), 2. Authentication Details, 3. Tags and Activation, 4. Assign Tags, and 5. Review and Confirm. The main content area is titled 'Basic Details' and includes a sub-header 'Provide the basic details needed for connector.' Below this, there is a 'Name' field with a red asterisk, containing the text 'Qualys_Azure_Connector'. A 'Description' field is also present, with a note indicating '250 characters remaining'. The 'Applications' section, titled 'Select applications to be associated with the connector.', shows two checked options: 'AssetView: Asset Inventory' and 'CloudView'. Below these, it states '98 connectors remaining'. There is an unchecked checkbox for 'Enable Remediation' with a sub-note: 'Fix the misconfigurations with one-click remediation. Ensure the required permissions are provided to the connector to perform remediation action.'

- 4) Select the account type: **Global** or **GovCloud**. You can choose only one account type per connector.
- 5) Set up **Authentication Details** and copy/paste the authentication details into the form.
- 6) Configure the asset tags in **Tags and Activation** for scanning if you plan to use a preauthorized scanner appliance.
- 7) Assign tags to the connector that you are creating.
- 8) Click **Create Connector**.

That's it! The connector establishes a connection with Microsoft Azure to start scanning Microsoft Azure resources for security issues using the Qualys Cloud Platform.


Set up Authentication Details

This section helps you to gather the parameters required to create Azure Connector.

Create Application and get Application ID, Directory ID

Create application in Azure Active Directory and you can then note the application ID.

1) Log on to the Microsoft Azure console and press Azure Active Directory in the left navigation pane.

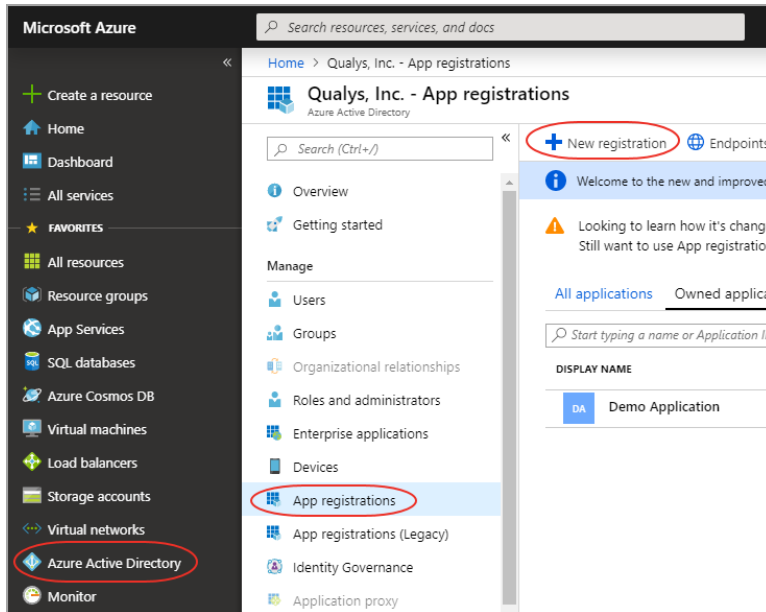


2) Click App Registrations > New registration.

3) Provide the following details:

- Name: A name for the application (For example, My_Azure_Connector)
- Supported account types: Select Accounts in any organizational directory.

4) Click Register. The newly created application is displayed with its properties. Copy the Application (client) ID and Directory (tenant) ID and paste it into the connector details.

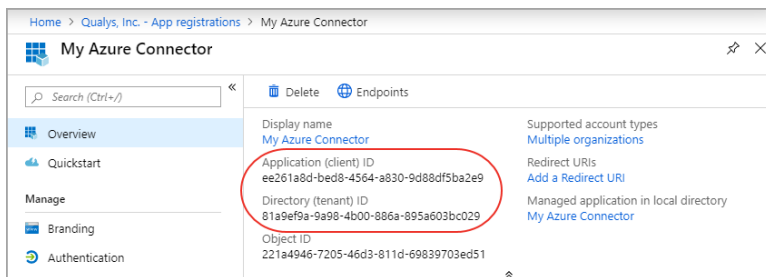


Generate Authentication Key


Provide permission to the new application to access the Windows Azure Service Management API and create a secret key.

1) Select the application that you created and go to API permissions > Add a permission.

2) Select Azure Service Management API in Microsoft APIs for Request API permissions.

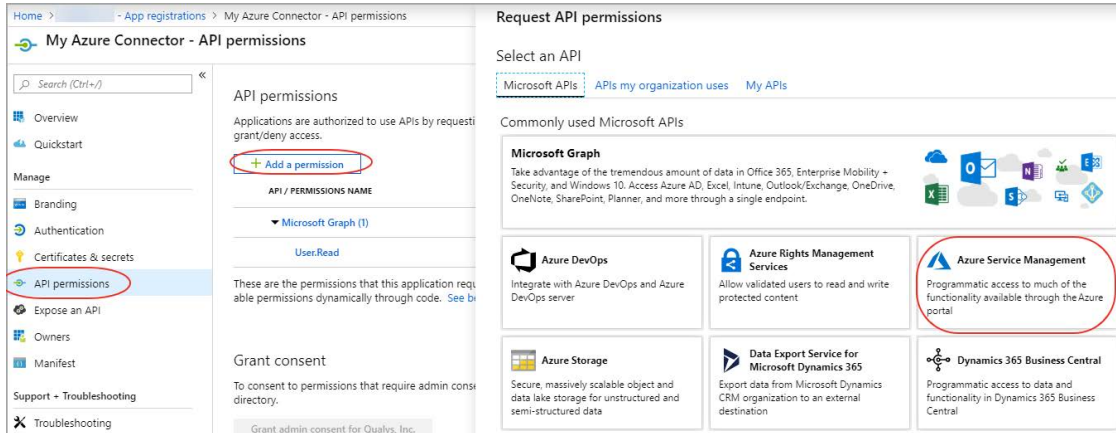


3) Select user impersonation permission and click Add permissions.

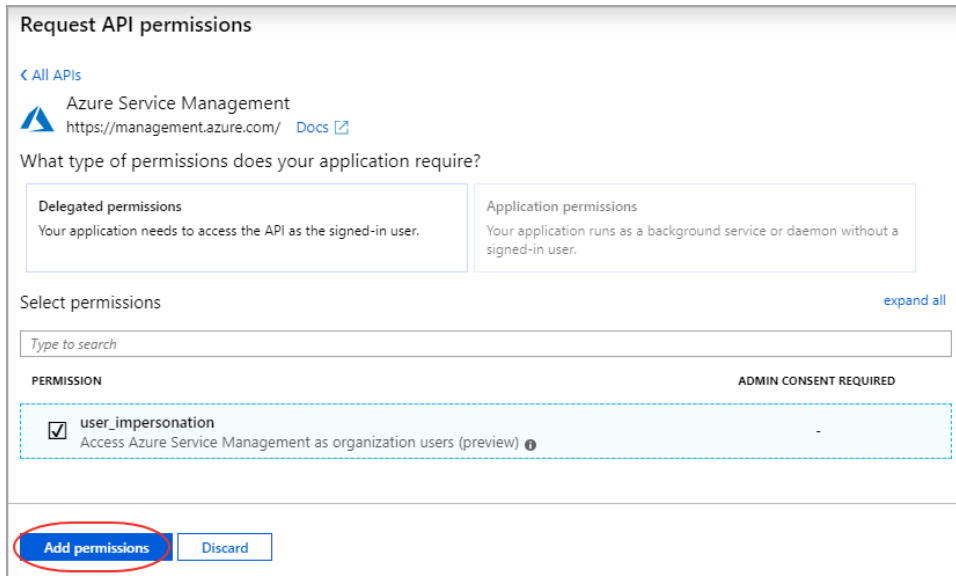

4) Select the application that you created and go to Certificates and Secrets > New client secret.

5) Add a description and expiry duration for the secret key and click Add.

Note: For security reasons, Microsoft limits creation of client secrets longer than 24 months and strongly recommends that you set this to a value less than 12 months. Customers can rotate the Azure Connector AD App ID key by updating the connector configuration via API scripts or the UI.

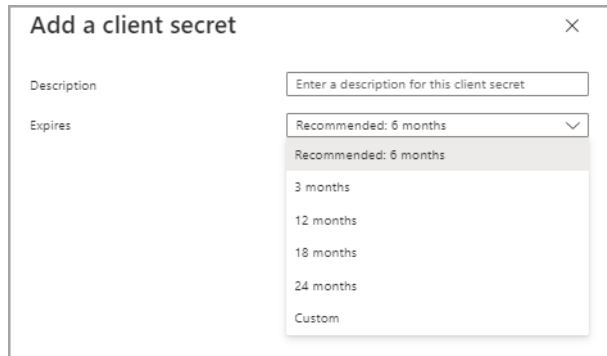


6) The value of the key appears in the Value field.

Copy the key value at this time. You won't be able to retrieve it later. Paste the key value as Authentication Key into the connector details. You need to provide the key value with the application ID to log on as the application. Store the key value where your application can retrieve it.

Acquiring Subscription ID

Grant permission for the application to access subscriptions. Assign a role to the new application. The role you assign defines the permissions for the new application to access subscriptions.

1) On the Azure portal, navigate to Subscriptions.

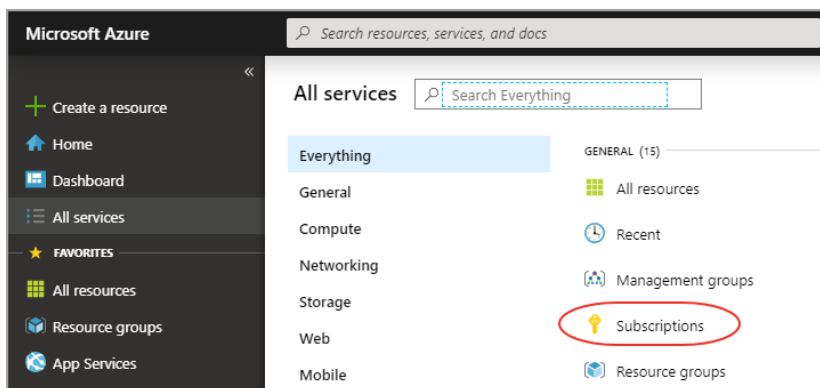

2) Select the subscription for which you want to grant permission to the application and note the subscription ID. To grant permission to the application you created, choose Access Control (IAM).


3) Go to Add > Add a role assignment. Pick a Reader role. A Reader can view everything, but cannot make any changes to the resources of a subscription.

Note: You need to assign the Reader role if the same application is used in AssetView and TotalCloud application. If the application usage is limited to only AssetView module (and not in TotalCloud application), you need to have at least below permissions on the built-in or custom role assigned to the subscription.

- "Microsoft.Compute/virtualMachines/read",
- "Microsoft.Resources/subscriptions/resourceGroups/read",
- "Microsoft.Network/networkInterfaces/read",
- "Microsoft.Network/publicIPAddresses/read",
- "Microsoft.Network/virtualNetworks/read",
- "Microsoft.Network/networkSecurityGroups/read"

4) Select Azure AD user, group, or application in Assign Access to drop-down.

5) Type the application name in Select drop-down and select the application you created.

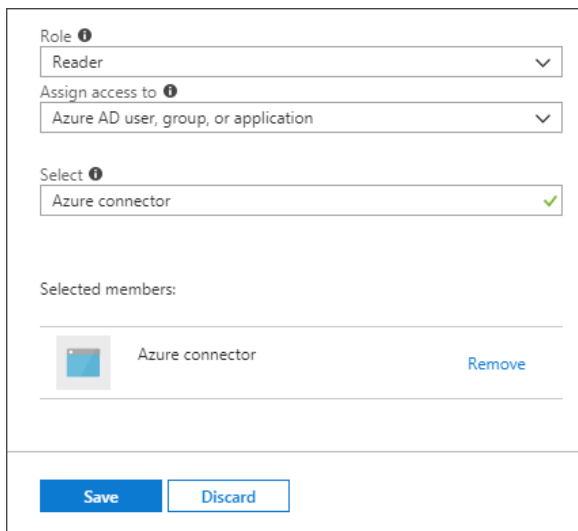

The screenshot shows the 'Assign Access to' dialog box in Azure. It has three main sections: 'Role', 'Assign access to', and 'Select'. The 'Role' dropdown is set to 'Reader'. The 'Assign access to' dropdown is set to 'Azure AD user, group, or application'. The 'Select' dropdown is set to 'Azure connector' with a green checkmark. Below these is a 'Selected members' section showing 'Azure connector' with a 'Remove' button. At the bottom are 'Save' and 'Discard' buttons.

6) Click Save to finish assigning the role. You'll see your application in the list of users assigned to a role for that scope.

7) Copy the subscription ID you noted and paste it into the connector details in the Qualys Azure Connector screen and then click Create Connector.

How Does Azure Connector Work?

Asset Discovery: The Azure connector performs asset discovery for your cloud with its continuous synchronization mechanism. The connector synchronizes every 4 hours with the Azure account and pulls in all virtual machines (After the connector run, if a virtual machine is found as terminated, connector stores such virtual machine with "DELETED" state.).

Azure retains the terminated virtual machines for only about 15 minutes. However, Qualys retains record and details of all the terminated virtual machines.

Synchronization of Assets: Adds the assets to your Qualys account. Except for assets with errors (as such assets are dropped off), all other assets are added to the Qualys account.

Azure Metadata

This section provides information on cloud provider metadata provided by Qualys Cloud Agent, AssetView Connector and Qualys Scanner

AssetView Connector & Qualys Cloud Agent Metadata

General:

- VM ID (compute.vmId)
- VM Name (compute.name)
- Platform /OS Type (compute.osType)
- Size (compute.vmSize)
- Image Offer (compute.offer)
- Image Publisher (compute.publisher)
- Image Version (compute.version)
- Subscription ID (compute.subscriptionId)
- Location (compute.location)
- Resource Group Name (compute.resourceGroupName)
- VM State (Only Running for QCA data collection)

Network:

- Private IP Address (network.interface.ipv4.ipaddress.privateIpAddress)
- Public IP Address (network.interface.ipv4.ipaddress.publicIpAddress)
- MAC Address (network.interface.macAddress)
- Subnet (network.interface.ipv4.subnet.address)

Azure VM Tags:

- LifeCycle (compute.tags)
- Owner (compute.tags)

- Department (compute.tags)

TAM-Demo-VM-05

View Mode

Asset Summary >

System Information >

Agent Summary >

Network Information >

Open Ports >

Installed Software >

Vulnerabilities >

Threat Protection RTIs >

Compliance >

File Integrity Monitoring >

Indication of Compromise >

Alert Notifications >

Azure VM Information >

Patch Management >

Azure VM Information

VM ID:

VM Name:

TAM-Demo-VM-05

Platform (OS Type):

Linux

Size:

Standard_B1s

Image Offer:

CentOS

Image Publisher:

OpenLogic

Image Version:

7.2.20170517

Subscription ID:

Location:

Resource Group Name:

VM State:

RUNNING

Network:

Private IP Address:

Public IP Address:

-

MAC Address:

Subnet:

10.0.1.0

Azure VM Tags:

LifeCycle:

05152020

Owner:

Department:

Product Management

Close

Scanner Metadata

Scanner metadata for authenticated scans on Azure Linux virtual machine– QID 45389

Computer:

- azEnvironment
- location
- name
- offer
- osType
- placementGroupId plan
- name
- product
- publisher
- platformFaultDomain
- platformUpdateDomain
- providerpublicKeys
- keyData

- path
- publisher
- resourceGroupName
- sku
- subscriptionId
- tags
- version
- vmId
- vmScaleSetName
- vmSize
- zone

Network Interface ipv4:

- ipAddress
 - privateIpAddress
 - publicIpAddress
- subnet
 - address
 - prefix

Network Interface ipv6:

- ipAddress
- macAddress

Azure APIs Used by Azure Connector to Discover Assets

Qualys uses Azure APIs to get all resource groups for a subscription and list all virtual machines for the specified resource group.

Resource Groups - List

<https://docs.microsoft.com/en-us/rest/api/resources/resourcegroups/list>

Virtual Machines - List

<https://docs.microsoft.com/en-us/rest/api/compute/virtualmachines/list>

Qualys APIs for Azure Connectors

You can perform various Azure connector operations through API as well. For detailed information on using Qualys APIs related to Azure, see the [Asset Management and Tagging API v2 User Guide](#).

Here are some useful Azure connector APIs:

Create Azure Connector

`https://qualysapi.qualys.com/qps/rest/2.0/create/am/azureassetdataconnector`

Get Host Asset Info (get the metadata of an Azure instance)

`https://qualysapi.qualys.com/qps/rest/2.0/get/am/hostasset/<id>`

Scanning in Azure Environments


Let us get familiar with few terms in networking basics.

VNet: An Azure Virtual Network (VNet) is a representation of your own network in the cloud. It is a logical isolation of the Azure cloud dedicated to your subscription. Each VNet you create has its own CIDR block and can be linked to other VNets and on-premises networks as long as the CIDR blocks do not overlap.

VNet peering: A mechanism that connects two virtual networks (VNets) in the same and/or different region through the Azure backbone network. Once peered, the two virtual networks appear as one for all connectivity purposes.

Single VNet Single Region


Scanners need to be configured to communicate to Qualys Cloud Platform over https (via Network security groups and proper routing).

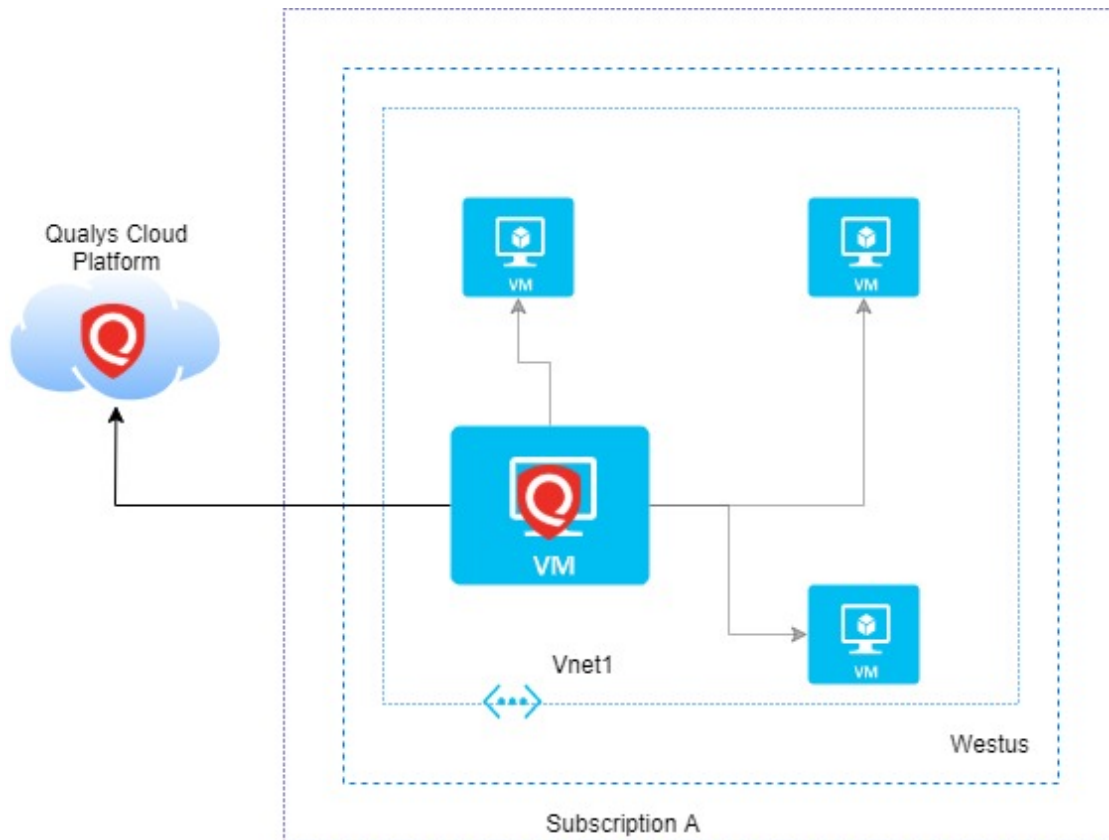

Single VNet Single Region Multiple Scanners

Based on number of virtual machines and scan frequency, multiple scanners might be required to scan multiple machines in a VNet. You can add more scanners based on requirements.


Scanners need to be configured to communicate to the Qualys Cloud Platform over https (via Network security groups and proper routing).

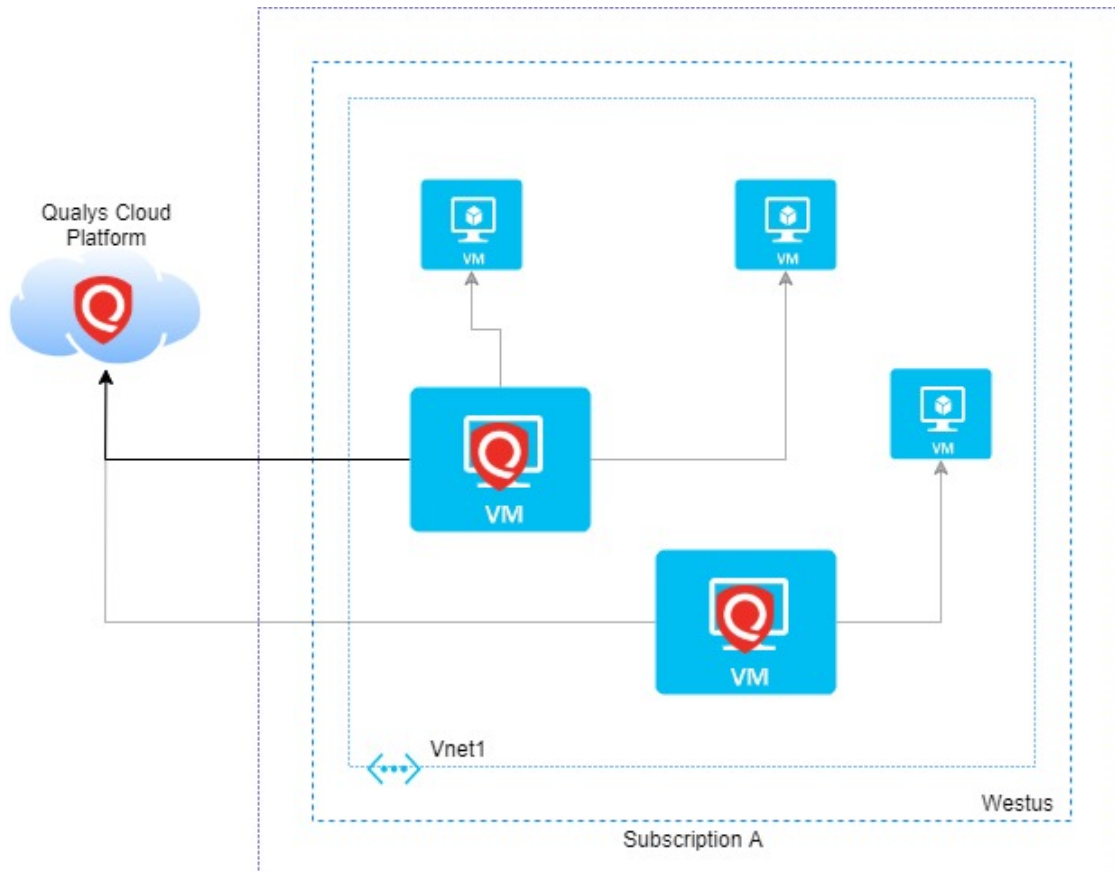

Multiple VNet Single Region

A single Scanner can reach multiple virtual machines in a peered VNets. Based on number of machines and scan frequency, multiple scanners might be required to scan multiple virtual machines across Peered VNets in a region.


Scanners needs to be configured to communicate to the Qualys Cloud Platform over https (via Network security groups and proper routing).

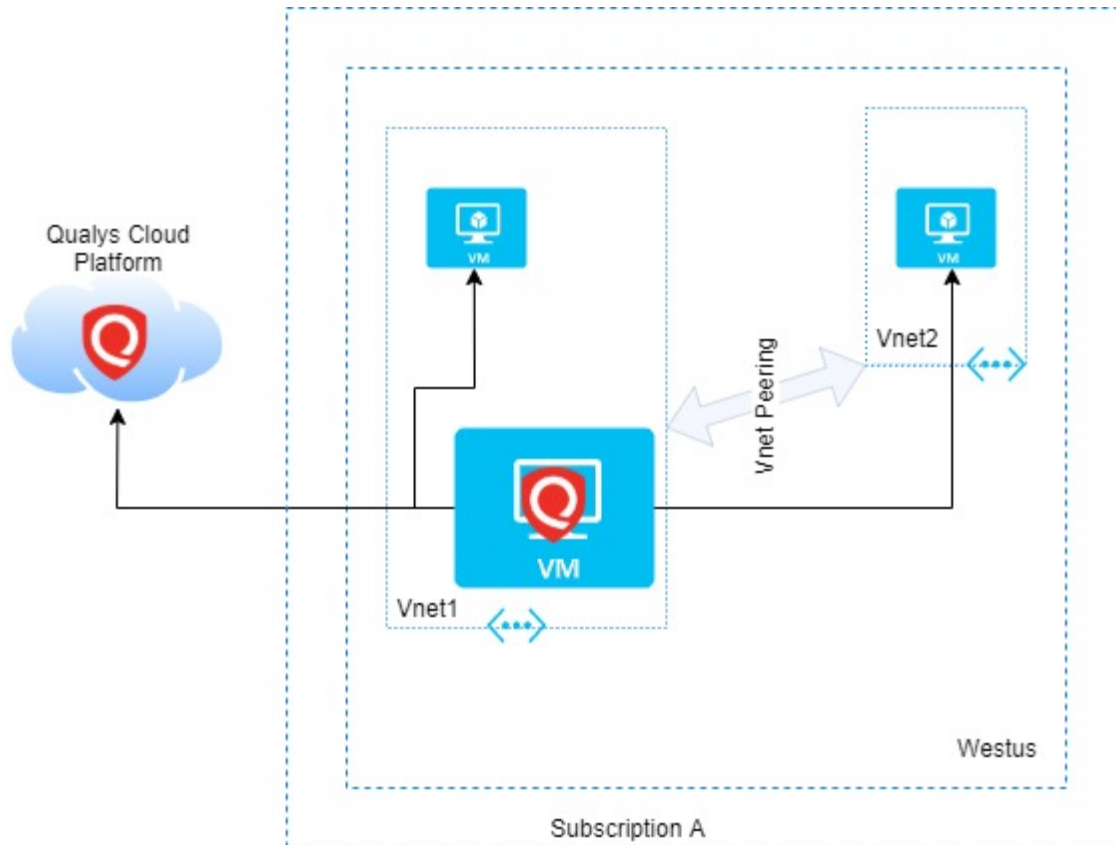

Multiple VNet Multiple Region

Azure allows peering of VNets across region hence a single scanner can reach virtual machines in different VNets in different regions. Based on number of machines and scan frequency, multiple scanners might be required to scan multiple virtual machines across Peered VNets in different regions.


Scanners needs to be configured to communicate to the Qualys Cloud Platform over https (via Network security groups and proper routing).

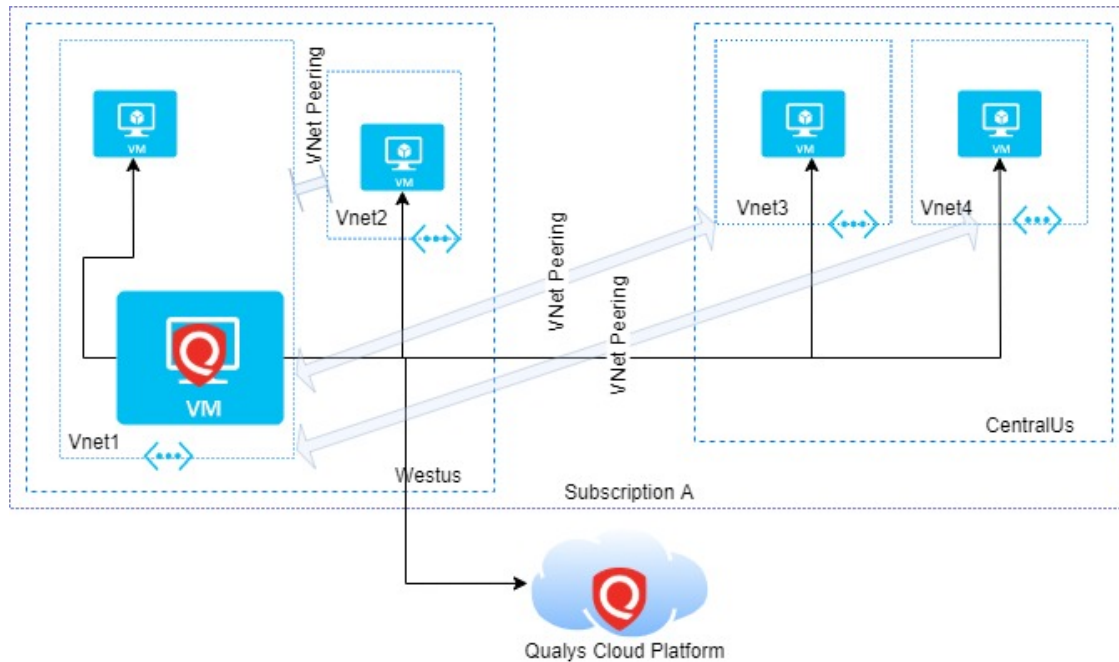

Non Peered VNets

Scanners reachability is curtailed if the VNets are not peered and hence cannot reach the virtual machines in non-peered VNets and launch a scan.

Scanners needs to be configured to communicate to the Qualys Cloud Platform over https (via Network security groups and proper routing).

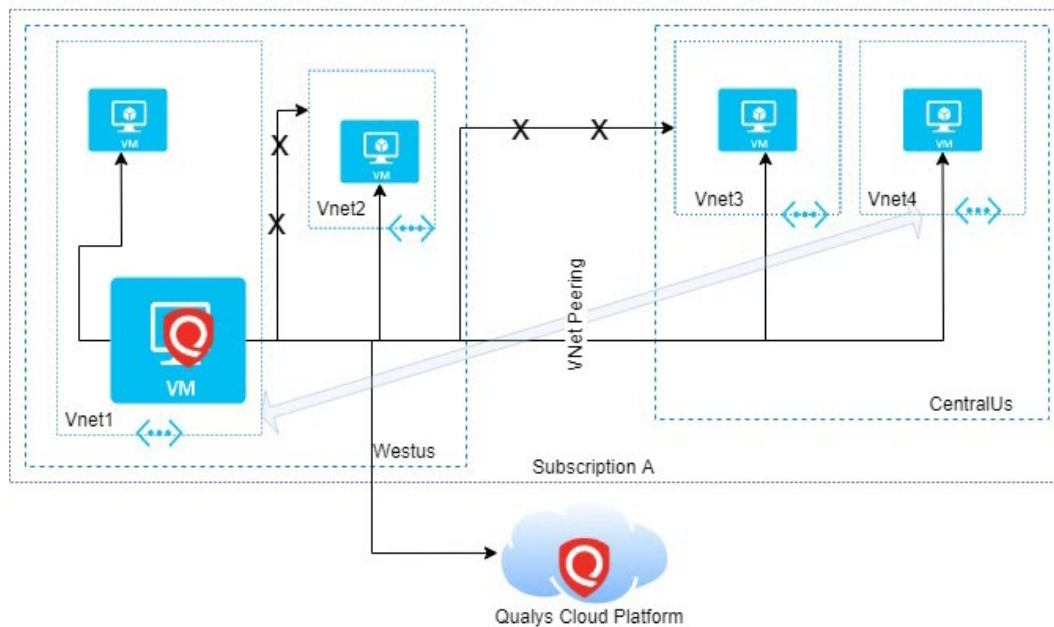

Deploying Sensors

Qualys sensors, a core service of the Qualys Cloud Platform, make it easy to extend your security throughout your global enterprise. These sensors are remotely deployable, centrally managed and self-updating. They collect the data and automatically beam it up to the Qualys Cloud Platform, which has the computing power to continuously analyze and correlate the information in order to help you identify threats and eliminate vulnerabilities.

Prior to scanning, you need to deploy sensors. Depending on your preference, you could deploy pre-authorized scanner appliance or Qualys Cloud Agent. Let's go through the steps involved in deploying these sensors.

[Deploying Scanners in Azure Platform](#)

[Deploying Scanners in Private Cloud Platform](#)

[Deploying Qualys Cloud Agent](#)



Virtual Scanner Appliances

Remote scan across your networks - hosts and applications

Applications: VM, PC, SCA



Cloud Agents

Continuous security view and platform for additional security solutions

Applications: CA (required), VM, PC, SCA



Internet Scanners

Perimeter scan for edge facing IPs and URLs

Applications: VM, PC, SCA

Deploying Scanners in Azure Platform

Cost and Licenses

Qualys Virtual Scanner Appliance is available as an Image at Azure Marketplace, ready for customers to launch onto Azure Virtual Machines. There are two aspects to consider:

- Qualys costs for the virtual scanner license subscription
- Azure costs for the computing resources to run the appliance as a virtual machine

Note: Ensure that you only use the image available at Azure marketplace or the Signed URL provided by Qualys for downloadable Azure specific images. Using images downloaded from Qualys UI are not recommended to be used on Azure.

Qualys Cost

You need to acquire a Qualys license for each virtual scanner appliance Instance you would like to run. This license is acquired from Qualys, not from Azure, and our scanner appliances are listed at Azure Marketplace with a BYOL (i.e., “bring your own license”) model accordingly. Each Qualys Virtual Scanner Appliance profile that you define in the Qualys Cloud Platform UI consumes a single virtual scanner appliance license. If you delete a virtual scanner appliance profile from your Qualys subscription, that license is freed up and immediately available for re-use. Contact your Qualys technical account manager or Qualys reseller for a pricing quotation or to request an evaluation.

Azure Cost

For each virtual scanner appliance, virtual machine is launched into one of your own Azure Subscriptions. You are responsible for paying Azure for the costs of running the appliance. Those costs include:

- Compute Capacity based upon size
- Storage - Data transfer IN/OUT

The compute capacity charges (i.e., CPU, RAM) are overwhelmingly the largest part of the costs to run an Instance. Note that you are not required to keep your scanner appliance(s) running at all times. Any hours during which your virtual machine is stopped, is incur only perGB provisioned storage charges. For those able to spend a little more upfront, Azure virtual machines can be reserved in advance by financially committing for one or three years to save. However, scanners should be turned on for at least several hours per week in order to ensure that they stay up-to-date with software and signatures.

Deployment Recommendations for Scanners

Virtual machine size for hosting the scanner

To host the Qualys Virtual Scanner Appliance, the maximum supported size for a virtual machine by Qualys is 16 CPUs and 16 GB RAM. Based on the frequency of scanning, and the number of Azure Virtual machines that are being scanned, you can scale up to 16 CPUs and 16 GB RAM.

Instance Snapshots/Cloning Not Allowed

Using a snapshot or clone of a virtual scanner instance to create a new instance is strictly prohibited. The new instance does not functions as a scanner. All configuration settings and platform registration information will be lost. This could also lead to scans failing and errors for the original scanner.

Moving/Exporting Instance Not Allowed

Moving or exporting a registered scanner instance from a virtualization platform (HyperV, VMware, XenServer) in any file format to Microsoft Azure cloud platform is strictly prohibited. This breaks scanner functionality and the scanner permanently loses all of its settings.

What do I Need?

The Virtual Scanner option must be turned on for your account. Contact Qualys Support or your Technical Account Manager if you would like us to turn on this option for you.

You must be a Manager or a sub-user with the “Manage virtual scanner appliances” permission. This permission may be granted to Unit Managers. Your subscription may be configured to allow this permission to be granted to Scanners.

Deploying Qualys Scanner Appliance

Extend the reach of the Qualys Cloud Platform to your Microsoft Azure infrastructure by deploying a Qualys Virtual Scanner Appliance - using Azure Resource Manager deployment. The appliance is a stateless resource that acts as an extension to the Qualys Cloud Platform. Once configured, all functionality is managed using your Qualys Cloud Platform account.

Here, we’ll describe how to deploy the Qualys Virtual Scanner Appliance using Microsoft Azure Resource Manager (ARM) or Resource Manager Templates. This scanner, once deployed, functions as a standard Virtual Scanner and can scan based on IP address or CIDR block.

Quick Steps

[Create Resource Group in Azure](#)

[Create Storage Account in Azure](#)

[Create Virtual Network in Azure](#)

[Add New Virtual Scanner in Qualys](#)

[Scanner Configuration in Azure using Resource Manager \(ARM\)](#)

[Scanner Configuration in Azure using Resource Manager Templates](#)

Create Resource Group in Azure

We recommend you create one resource group per location for your Qualys virtual scanners. Give your resource group a name that is easy to recognize and represents the group location. Once created, the name cannot be changed.

To learn more about the resource group, visit Azure documentation, <https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/manage-resource-groups-portal>.

Create Storage Account in Azure

If you do not have a storage account for your Qualys virtual scanners, you’ll need to create one.

To learn more about creating storage account, visit Azure documentation, <https://docs.microsoft.com/en-us/azure/storage/common/storage-account-create?tabs=azure-portal>.

Create Virtual Network in Azure


If you do not have a virtual network set up for your Qualys virtual scanners, you should create one.

To learn more about creating virtual networks, visit Azure documentation, <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-overview>.


Add New Virtual Scanner in Qualys

Create a virtual scanner in the Qualys Cloud Platform, assign it a distinct scanner name and record the exact personalization code.


Select VM/VMDR or PC from the Qualys app picker. Then navigate to Scans > Appliances and select New > Virtual Scanner Appliance.

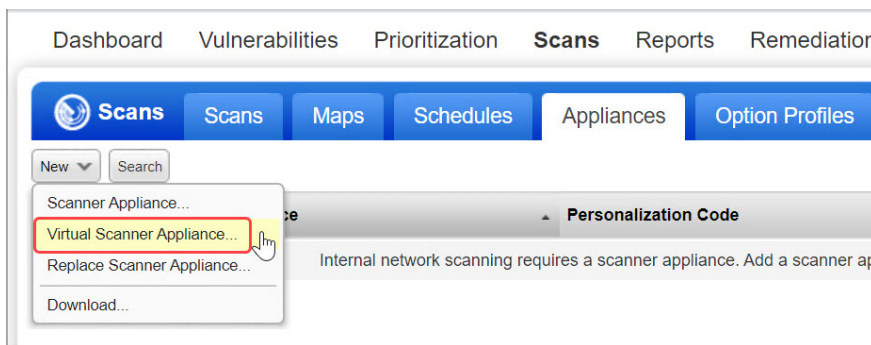


Choose “I have My Image” and click Continue. Provide a name and click Next.

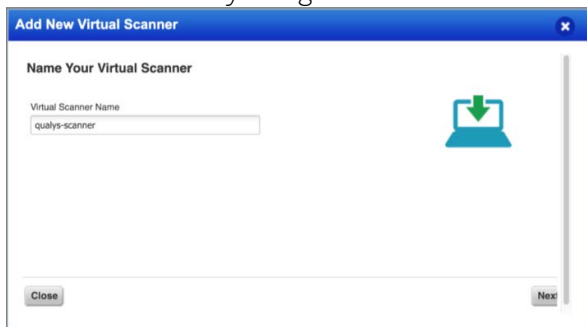

Click Next, scroll down and then copy the personalization code.

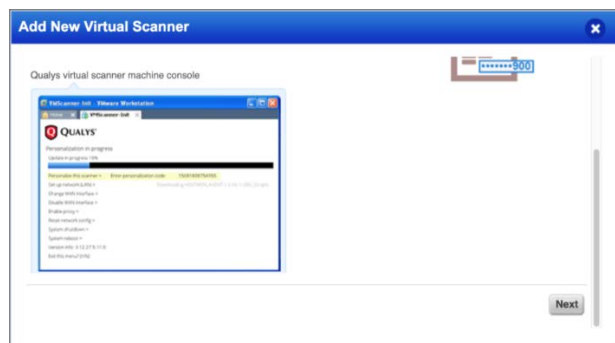

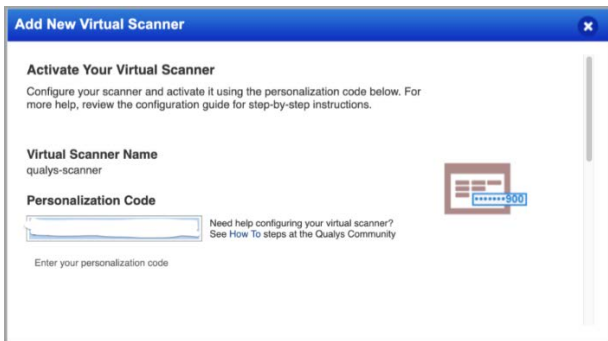


After getting Personalization Code, click Check Activation and then click Done on the last screen. This completes the steps to create and notifies users about creation of virtual scanner appliance.

Scanner Configuration in Azure using Resource Manager (ARM)

Find and select Qualys Virtual Scanner Appliance in the Marketplace and click Create to deploy the scanner.

Note: Please only use the Qualys Virtual Scanner Appliance image available on the Azure Marketplace or the Signed URL provided by Qualys. Using images downloaded from the Qualys UI will not work on Azure Cloud, even with disk format conversions.

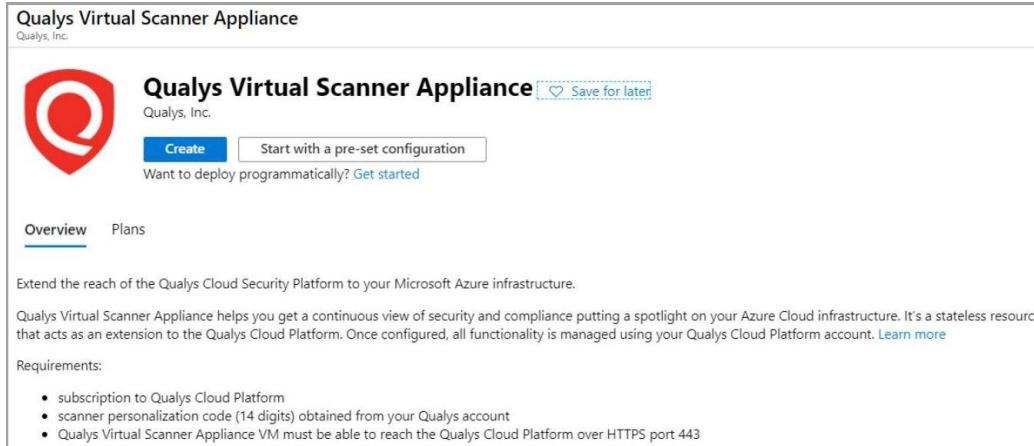

Enter the following required information and click Next: Disks+Monitoring:

Subscription

Resource group:

To learn more about resource group, visit Azure documentation, <https://docs.microsoft.com/en-us/azure/azure-resource-manager/management/manage-resource-groups-portal>.

Region

Scanner VM name: Scanner VM name must be between 1 and 64 characters long and may contain alpha-numeric characters, dots '.' and hyphens '-' only. It must start and end with alpha-numeric character.

Perscode: Enter the 14-digit perscode obtained from Qualys.

VM size: The appliance only supports up to 16 cores and 16GB memory.

Optional field

Proxy: You can configure the Qualys Scanner to use SSL proxy for all outbound communication with the Qualys Cloud Platform. We support both IP and FQDN for the proxy server configuration.

Provide optional proxy configuration in one of the following formats:

proxy://<host>:<port> (No auth proxy)

proxy://<user>:<password>@<host>:<port> (Auth proxy)

proxy://<domain\user>:<password>@<host>:<port> (Auth proxy with domain user)

Create Qualys Virtual Scanner Appliance

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription *

Resource group *

Qualys-Virtual-Scanners

Create new

Instance details

Region *

(US) East US

Scanner VM name *

qualys-scanner

Personalization code

Please provide personalization code for scanner.

[Learn more](#)

Perscode *

Proxy configuration

i

Provide optional proxy configuration in one of the following formats-
 proxy://<host>:<port> (No auth proxy)
 proxy://<user>:<password>@<host>:<port> (Auth proxy)
 proxy://<domain\user>:<password>@<host>:<port> (Auth proxy with domain user)

Review + create

< Previous

Next : Disks+Monitoring >

Make your selection to use premium disk and/or Boot diagnostics and then click Next: Networking:

Note: Enable boot diagnostics to troubleshoot issues with your scanner. Diagnostics will include log output from the scanner. To learn more about Boot diagnostics, visit Azure at: <https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/boot-diagnostics>.

The screenshot shows the 'Disks+Monitoring' tab in the Azure portal. It has four tabs: 'Basics', 'Disks+Monitoring' (selected), 'Networking', and 'Review + create'. Under 'Disk options', there is an information icon and a message: 'Premium Disk is recommended due to their production performance but only available with selected VM sizes.' Below this is a toggle for 'Use premium disk ? *' with 'Yes' and 'No' buttons. Under 'Monitoring', there is another information icon and a message: 'Boot diagnostics helps in troubleshooting issues.' Below this is a toggle for 'Boot diagnostics *' with 'On' and 'Off' buttons. At the bottom, there is a dropdown for 'Diagnostics storage account *' with the text '(configure required settings)' and a 'Create New' link.


Make your network selections and click Review + create.

To learn more about Networking, visit Azure documentation, <https://docs.microsoft.com/en-us/azure/networking/>.

The screenshot shows the 'Networking' tab in the Azure portal. It has four tabs: 'Basics', 'Disks+Monitoring', 'Networking' (selected), and 'Review + create'. Under 'Virtual network', there is a section 'Configure virtual networks'. It includes a dropdown for 'Virtual network *' with the value '(new) qualys-scanner-VNet-752' and a 'Create new' link. Below that is a dropdown for 'Subnet *' with the value '(new) scanner-subnet (10.1.30.0/24)' and a 'Create new' link. There is a toggle for 'Require public IP ?' with 'Yes' and 'No' buttons. At the bottom, there is a dropdown for 'Public IP *' with a 'Create new' link. At the very bottom, there is an information icon and a message: 'Deployment will create a DEFAULT security group. Direction: Inbound, Source: Any, Access: Deny, Priority:1001. Direction: Outbound, Destination: Any, Access: Allow, Priority:1002'.

If validation passes, click Create button. If validation fails, please correct the fields that are displayed in red.

Once Azure completes the deployment, click Go to Resource to access the scanner deployment in your resource group:

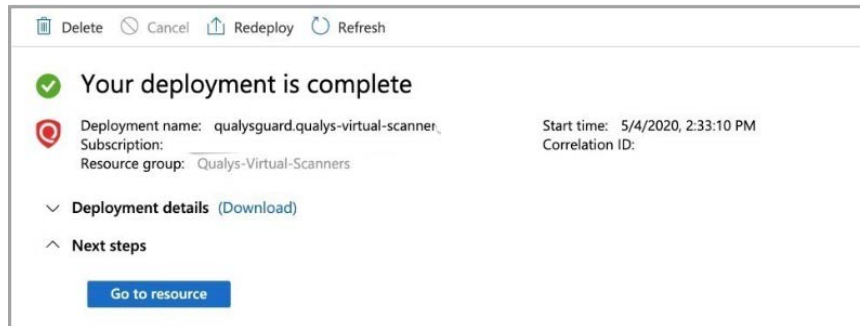

Your scanner will update and connect to the Qualys Cloud Platform. This process may take some time, depending on location. Once connected, you'll be able to use your Azure scanner from the Qualys Cloud Platform as you would any virtual scanner appliance.

Scanner Configuration in Azure using Resource Manager Templates

Here we'll tell you how to use Azure CLI with Resource Manager templates to deploy a Qualys Scanner in Azure.

- Your template can be a local file or an external file which is available through a URI.

Deploy Your Qualys Scanner from Azure CLI

To deploy from marketplace, download the [Qualys Scanner Marketplace template](#) and use the parameter file - [deploy_from_global_marketplace_image.json](#).

Edit the `deploy_from_global_marketplace_image.json` file and set all needed parameters according to your own Azure environment. Then run the following Azure CLI command to deploy your Qualys Virtual Scanner:

```
az deployment group create --debug --verbose --template-file
azure_deploy.json --resource-group resource-group-name --
parameters path_to_json_parameter_file
```

Deployment requires the following parameters:

- perscode: Enter the 14-digit personalization code obtained from Qualys Cloud Platform.
- bootDiagStorageAccNameOrUri: Enter the storage account name to enable Boot Diagnostics.
- proxy: Optional proxy configuration in one of the following formats:

```
proxy://<host>:<port> (No auth proxy)
proxy://<user>:<password>@<host>:<port> (Auth proxy)
proxy://<domain\user>:<password>@<host>:<port> (Auth proxy with domain
user)
```



- scannerVmSize – Select any size up to 16 cores and 16 GB RAM.


To learn more about Azure templates, please visit [Microsoft Documentation on Azure Resource Manager Templates](#).


How do I know my scanner is ready to use?

Check your virtual scanner status in the Qualys UI. Go to Scans > Appliances and find your scanner in the list.

Note: It can take several minutes for the Qualys user interface to get updated after you add a new appliance. Please refresh your browser periodically to ensure that you are seeing the most up to date details.

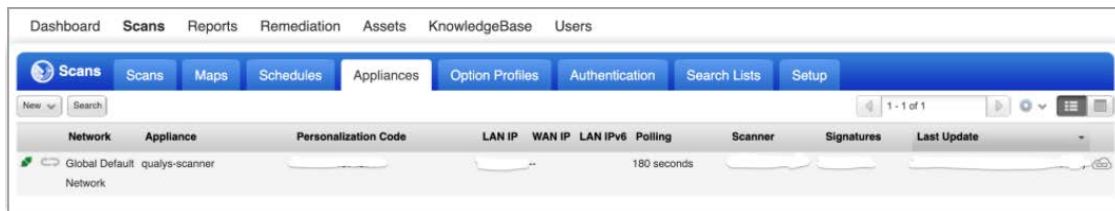

The  icon tells you your virtual scanner is ready. Now you can start internal scans!

The  icon indicates the busy icon, which is greyed out until a scan is launched on the scanner

Updating proxy settings upon deployment

User can update their scanner with new proxy settings or disable the proxy upon deployment. To do so, locate your scanner virtual machine and click Reset password.


To update with new proxy settings, enter the new proxy configuration value in 'Password' and 'Confirm Password' fields and click Update button.

Note: Password fields should be prefixed with **proxy://**. This is because Azure cloud does not have mutable user metadata and the scanner interprets password value as an SSL proxy URL token, prefixed with **proxy://**.

Username: u<Perscode>, e.g. u9999999999999999

Password: proxy://<new proxy value>


Confirm Password: proxy://<new proxy value>

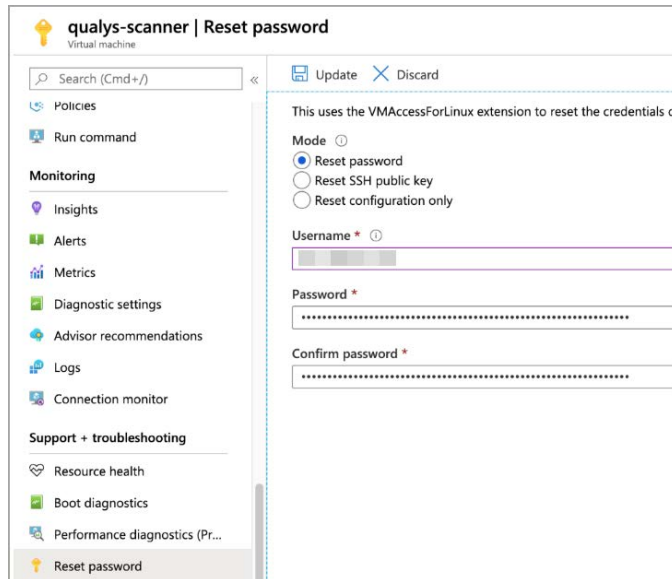

To disable proxy, click Reset password, enter the exact value, “*Rem0ve_Pr0xy*”, for Password and Confirm Password fields and click Update button.

How to troubleshoot issues with the scanner

If boot diagnostics was not enabled during scanner deployment and you would like to troubleshoot issues with your scanner, you can still enable Boot diagnostics. Diagnostics will include log output from the scanner. From the virtual machine details, click Boot diagnostics, Set Status to On and select the storage account created for your Qualys scanners. Click Save and reboot the virtual machine, if needed.

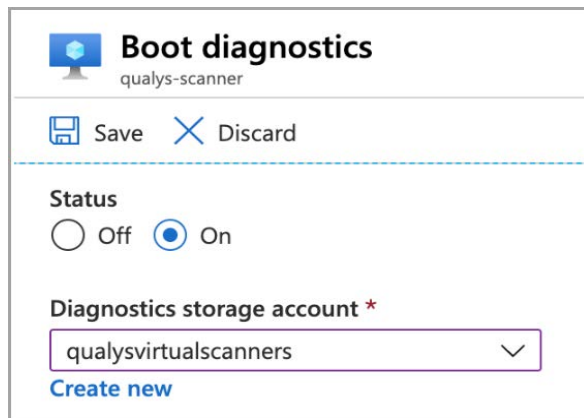

Click Boot diagnostics to view the serial log.

Boot diagnostics

<<

Refresh

Settings

nt (...)

Screenshot

Serial log

Updated: Monday, May 4, 2020, 9:54:41 PM UTC

Download serial log

```

BIOS-e820: 00000000009fc00 - 0000000000a0000 (reserved)
BIOS-e820: 0000000000e0000 - 000000000100000 (reserved)
BIOS-e820: 000000000100000 - 000000003ffff0000 (usable)
BIOS-e820: 000000003ffff0000 - 000000003ffff0000 (ACPI data)
BIOS-e820: 000000003ffff0000 - 00000000400000000 (ACPI NVS)
BIOS-e820: 00000001000000000 - 00000004c00000000 (usable)
bootconsole [earlyser0] enabled
Running on hyperv [Microsoft Corporation|Virtual Machine|7.0|0000-0006-9405-5679-7884-5158-31]
MemTotal: 16383 MB, cpuinfo: Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz, 8 processor[s], 4 core[s], 1 socket
[s]
Hyper-V Host Build:14393-10.0-0-0.305; Vmbus version:4.0
Hyper-V vmbus-00000000-0000-8899-0000-000000000000, driver:hv_storvsc, insmod:hv_storvsc
Hyper-V vmbus-00000000-0001-8899-0000-000000000000, driver:hv_storvsc
Hyper-V vmbus-000d3a1a-993b-000d-3a1a-993b000d3a1a, driver:hv_netvsc, insmod:hv_netvsc
Hyper-V vmbus-242ff919-07db-4180-9c2e-b86cb68c8c55, driver:hv_utils, insmod:hv_utils
Hyper-V vmbus-2450ee40-33bf-4fbd-892e-9fb06e9214cf, driver:hv_utils
Hyper-V vmbus-2dd1ce17-079e-403c-b352-a1921ee207ee, driver:hv_utils
Hyper-V vmbus-b6650ff7-33bc-4840-8048-e0676786f393, driver:hv_utils
Hyper-V vmbus-f8b3781a-1e82-4818-a1c3-63d806ec15bb, driver:hv_storvsc
Hyper-V vmbus-f8b3781b-1e82-4818-a1c3-63d806ec15bb, driver:hv_storvsc
Hyper-V vmbus-fd149e91-82e0-4a7d-afa6-2a4166cbd7c0, driver:hv_utils
Mass storage at pci:0000:00:07.1:0180, V:D=0x8086:0x7111, driver:ata_piix, insmod:ata_piix
Waiting for SCSI bus to stabilize... 1 sec, 3 host(s)
scsi [Virtual Disk ], driver:sd_mod, insmod:crc-t10dif sd_mod
scsi [Virtual Disk ], driver:sd_mod
Reading all physical volumes. This may take a while...
Found volume group "vgqualys0" using metadata type lvm2
0 logical volume(s) in volume group "vgqualys0" now active

```

For any errors or troubleshooting tips, visit [Scanner Troubleshooting FAQs](#).

35

Deploying Scanners in Private Cloud Platform

This section helps you to deploy Qualys scanner in private cloud platform using following methods:

- CLI
- Azure GUI

Deploying Qualys Scanners (using CLI)

This section describes how to deploy Qualys Virtual Scanner Appliances using the Azure CLI. Once deployed, the scanner functions as a standard Virtual Scanner and can scan based on IP address or CIDR block.

Want to learn more about Microsoft Azure? Check out the [Azure Support page](#).

Quick Steps

[Creating Resource Group](#)

[Creating Storage Account](#)

[Creating Storage Container](#)

[Creating Virtual Network](#)

[Copying Qualys image into your Storage Account](#)

[Creating Deployment templates](#)

[Deploying Qualys Scanner via CLI](#)

Creating Resource Group

We recommend you to create one resource group per location for your Qualys virtual scanners. Give your resource group a name that is easy to recognize and represents the group location and tell us where the group is created. Once created, the name cannot be changed.

az CLI

Example: `az group create --name resource-group-qualys-scanner --location centralus`

where *name* is the resource group name, and *location* is the location where we create the group

Help: `-h`, `--help` for output usage information

Creating Storage Account

We recommend you create at least one storage account for your Qualys virtual scanners.

az CLI

Example: `az storage account create --name storagequalys --resource-group resource-group-qualys-scanner --sku Standard_LRS --kind Storage --location centralus`

where *name* is the storage account name, *resource-group* is the resource group name, *sku* is the SKU name (Premium_LRS, Standard_GRS, Standard_LRS, Standard_RAGRS, Standard_ZRS), *kind* is the account kind (BlobStorage, Storage, StorageV2), *location* is the location

Help: -h, --help for output usage information

Creating Storage Container

You need to create a container in your storage account where qvsa images are stored.

az CLI

```
Example: az storage container create --name images --account-name
storagequalys --account-key
"AbcdefDKBFEHMKxeelzL4fsxINIm7gPrG+dVoirJFuCVEknW9TbCXVEUDxs1Oeg+heAcosc
/SiCUhAzwN0uy+2w=="
```

where *name* is the storage container name, *account-name* is the storage account name, *account-key* is the storage account key

Help: -h, --help for output usage information

Creating Virtual Network

You may already have a virtual network set up for your Qualys virtual scanners. If not, create a new virtual network with 10.0.0.0/24 subnet.

az CLI

```
Example: az network vnet create --name qualys-scanner-vnet --address-
prefixes "10.0.0.0/24" --resource-group resource-group-qualys-scanner --
location centralus
```

where *name* is the name of the virtual network, *address-prefixes* is a comma separated list of address prefixes for this virtual network, *resource-group* is the name of the resource group, *location* is the location

Help: -h, --help for output usage information

Copying Qualys image into your Storage Account

Now you need to copy Qualys qVSA image to your storage account. The qVSA image link is provided to you by Qualys Operations.

az CLI

```
Example: az storage blob copy start --source-uri
"https://images.blob.core.windows.net/images/qVSA-Azure.X.X.XX-
x.vhd?sr=b&sp=r&sv=YYYY-MM-DD&st=YYYY-MM-
DDT18%3A48%3A39Z&sig=KC8UdRkX8XsdvG2efy5H8uIPVcdccqzWr6fiMzEMdY8%3D&se=Y
YYY-MM-DDT18%3A48%3A39Z" --account-name scanneraccount --account-key
"Abcdefghijkl/XabePHYIyXX2qcHQ/mvghcZyvFoImSos2z87IhXU1HRSSO2k+awzUZePSq
T3AbpOExAmPlE==" --destination-blob qVSA-Azure.X.X.XX-x.vhd.vhd --
```

```
destination-container scanner-images
```

where *source-uri* is the qVSA image link provided by Qualys Operations, *account-name* is the storage account name, *account-key* is the storage account key, *destination-blob* is the blob name, *destination-container* is the destination storage container name

Help: -h, --help for output usage information

Creating Deployment templates

To deploy Qualys scanner from the command line you need to create deployment templates.

Download custom [Qualys Scanner template and parameter files](#) and adjust them to your Azure Cloud environment.

To use the CLI in interactive mode, run:

```
az deployment group create --debug --verbose --template-file
azure_deploy.json --resource-group <your resource group>
```

If your scanner requires proxy configuration, use a parameter file to supply the proxy configuration.

Example:

```
az deployment group create --debug --verbose --template-file
azure_deploy.json --resource-group resource-group-name --parameters
path_to_json_parameter_file
```

Deployment requires the following parameters:

- persCode – Enter the 14-digit personalization code obtained from Qualys Cloud Platform.
- ImageResourceIdOrVhdUri – enter the resource id or vhd uri of the scanner image you copied into your Storage account in the previous step
- bootDiagStorageAccNameOrUri – enter the storage account name to enable Boot Diagnostics

proxy – Optional proxy configuration in one of the following formats:

```
proxy://<host>:<port> (No auth proxy)
```

```
proxy://<user>:<password>@<host>:<port> (Auth proxy)
```

```
proxy://<domain\user>:<password>@<host>:<port> (Auth proxy with domain user)
```

- scannerVmSize – select any size up to 16 cores and 16 GB RAM

To learn more about Azure templates, visit: [Microsoft Documentation on Azure Resource Manager Templates](#)

Deploying Qualys Scanner via CLI

Prior to deploying the Qualys Virtual Scanner in Azure, be sure to have generated a personalization code from the Qualys Cloud Platform and customizing the deployment template as in the previous step. The personalization code should already be recorded in your parameters file under the parameter, *perscode*.

az CLI

Example: `az deployment group create --resource-group <your resource group> --template-file azure_deploy.json --parameters <path to json parameter file>`

where *resource-group* is the name of the resource group, *name* is the name of the deployment, *template-file* is the path to the template file in the file system, *parameters* is a file containing parameters

Help: -h, --help for output usage information

Using Azure GUI to Create Qualys Image and Deploy Scanner

Alternatively, user can also use the Azure GUI to create the Qualys image from a VHD file and deploy the Qualys Virtual Scanner Appliance.

Note: The Qualys qVSA image vhd file should have already been uploaded to your storage container in order to create an image, see Copying Qualys image into your Storage Account for details.

From the Microsoft Azure Dashboard, choose Images – Add to create image.

Fill in all the required information for your new image:

- Name – give a distinct name for your scanner image
- Subscription
- Resource Group
- Location
- OS Type – select Linux
- VM Generation – select Gen 1
- Storage Blob – choose the location of the ‘.vhd’ file that is already copied into your Storage account
- Storage Type – select Standard HDD
- Host caching – select Read/Write

Create image

Name *

qVSA-Azure-XX.XX-x

Subscription *

Scanner

Resource group *

Scanner-RG

Create new

Location *

(US) East US

Zone resiliency ⓘ

On Off

OS disk

OS type * ⓘ

Windows Linux

VM generation * ⓘ

Gen 1 Gen 2

Storage blob *

https://images.blob.core.windows.net/qvsa-images/qVSA-Azure.XX.XX-x.vhd

Browse

Storage type * ⓘ

Standard HDD

Host caching * ⓘ

Read/write

Data disks

+ Add data disk

To deploy the Qualys Virtual Scanner Appliance using the image created in the previous step, select the scanner image and click Create VM:

Images

qVSA

Overview

Activity log

Access control (IAM)

Tags

Settings

Locks

Export template

Support + troubleshooting

New support request

NAME

qVSA

SOURCE VIRTUAL MACHINE

-

OS DISK

OS type Source Blob URI Storage type Caching

Linux https://images.blob.core.windows.net/qvsa-images/qVSA-Azure.XX.XX-x.vhd Standard HDD Read/write

DATA DISKS

This image doesn't contain any data disks.

RESOURCE GROUP

Scanner-RG

LOCATION

East US

ZONE RESILIENCY

Disabled

SUBSCRIPTION

Scanner

RESOURCE ID

/subscriptions/.../resourceGroups/Scanner-RG/providers/Microsoft.Compute/images/qVSA

Create a virtual machine

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription ⓘ

Scanner

Resource group * ⓘ

Scanner-RG

Create new

Instance details

Virtual machine name * ⓘ

qualys-scanner

Region ⓘ

(US) East US

Availability options ⓘ

No infrastructure redundancy required

Image * ⓘ

qVSA

Browse all public and private images

Azure Spot instance ⓘ

☐ Yes
☒ No

Size * ⓘ

Standard B2ms
2 vcpus, 8 GiB memory (\$60.74/month)
[Change size](#)

Administrator account

Authentication type ⓘ

☐ SSH public key
☒ Password

Username * ⓘ

u!

Password * ⓘ

.....

Confirm password * ⓘ

.....

Review + create

< Previous

Next : Disks >

Since Qualys Virtual Scanner is a locked-down Linux appliance and managed completely from the Qualys Cloud Platform, Azure username, password and SSH public key are not used for any kind of authentication but rather as a mechanism to pass proxy configuration information from Azure Cloud to the appliance.

Passwords that look like “proxy://<user>:<password>@<host>:<port>” URLs can be used to configure the Qualys Virtual Scanner to use SSL proxy for all outbound communication with the Qualys Cloud Platform.

Valid proxy configuration formats:

proxy://<host>:<port> (No auth proxy)

proxy://<user>:<password>@<host>:<port> (Auth proxy)

proxy://<domain\user>:<password>@<host>:<port> (Auth proxy with domain user)

Deploying Qualys Cloud Agent

This section helps you to deploy Qualys cloud agent using different methods.

Deploy Qualys Cloud Agent from Microsoft Defender for Cloud

This section describes how to install Qualys Cloud Agents (Windows and Linux) for Azure virtual machines from the Microsoft Defender for Cloud console and view vulnerability assessment findings within Microsoft Defender for Cloud and your Qualys subscription.

Microsoft Defender for Cloud provides a unified security management and monitoring console for Azure infrastructure. Qualys is integrated into the Microsoft Defender for Cloud's partner solutions for Vulnerability assessment. The Microsoft Defender for Cloud detects the virtual machines without the solution and automates the deployment of the lightweight Qualys cloud agents on them. The agents gather vulnerability data and send it to the Qualys Cloud Platform, which in turn, provides vulnerability and health monitoring data back to Microsoft Defender for Cloud.

Using our revolutionary Qualys Cloud Agent platform you can deploy lightweight cloud agents to continuously assess your infrastructure for security and compliance.

We also recommend the following resources:

[Qualys Cloud Platform](#)

[Qualys Cloud Agent Getting Started Guide](#)

Quick Steps

[Create Asset Tag in AssetView \(Optional\)](#)


[Create Activation Key in Cloud Agent](#)

[Deploy Cloud Agents in Azure](#)

Create Asset Tag in AssetView (Optional)

Asset tags provide the ability to uniquely list out assets. As a best practice, we recommend you create a tag called “Azure” that you’ll use to easily distinguish the assets in the Azure cloud from the rest. You’ll associate the tag with the activation key in the next step.

Choose AssetView from the module picker, then go to Assets > Tags and click New Tag.

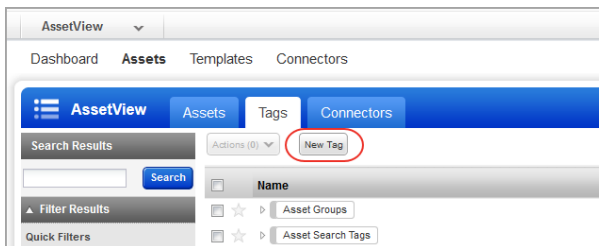


In the Tag Creation wizard, give your tag a name, and choose No Dynamic Rule under Tag Rule (required when adding tags to keys). Click Finish when you’re done.


Create Activation Key in Cloud Agent

Now we'll describe how to create an activation key. At the end of this step you'll have the license code and public key needed to deploy agents in Azure. We recommend you handle the Azure cloud deployments via a designated activation key. Additionally, manage your departments with separate activation keys.


Choose Cloud Agent from the module picker, then go to Agent Management > Agents and click Install New Agent.

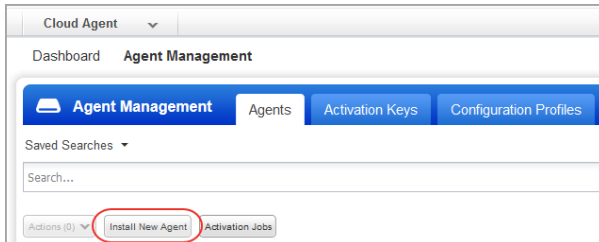

Give the key a unique name (example: AzureAgentsActivationKey) and select VM and/or PC modules, depending on your licenses. We encourage you to have both solutions to secure your assets in Azure completely.

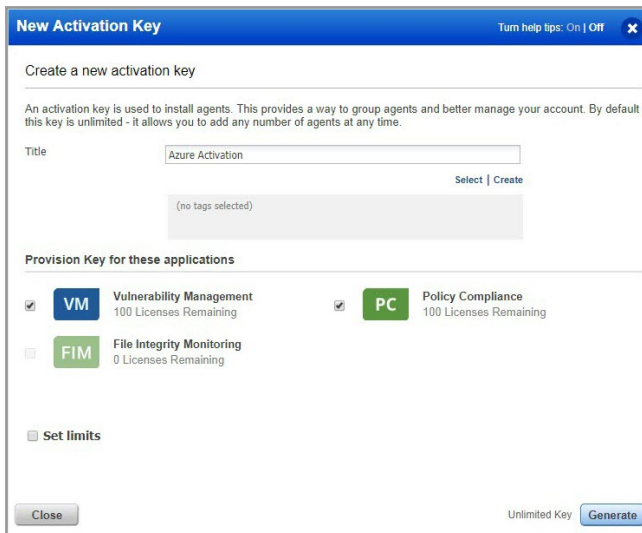


Did you create an asset tag for Azure? Select the tag at this time. Then click Generate.

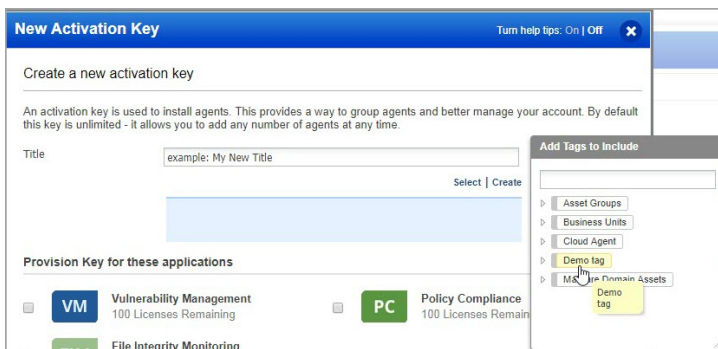

As part of this integrated deployment, the Azure agent is currently supported for Windows and Linux. (Linux agent support is recently added).

Click the Install Instructions button for Windows or Linux.

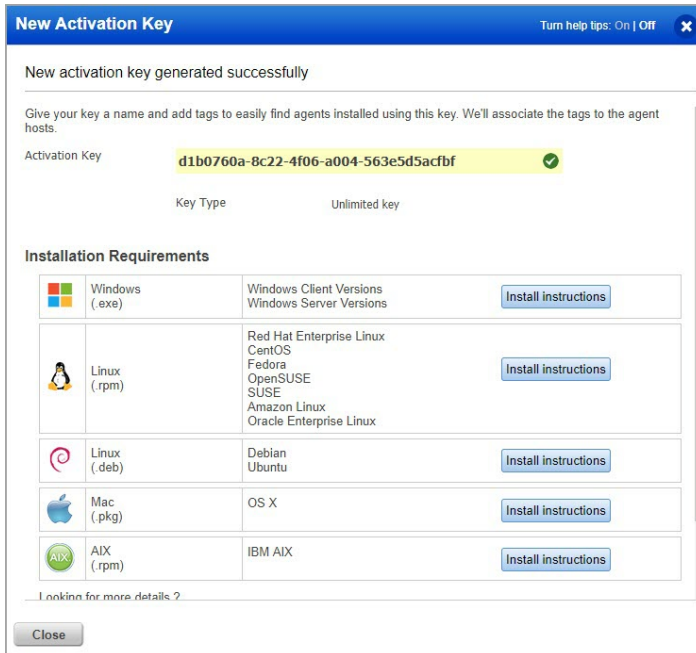

New Activation Key Turn help tips: On | Off






New activation key generated successfully

Give your key a name and add tags to easily find agents installed using this key. We'll associate the tags to the agent hosts.

Activation Key **d1b0760a-8c22-4f06-a004-563e5d5acbf**


Key Type Unlimited key

Installation Requirements

 Windows (.exe)	Windows Client Versions Windows Server Versions	Install instructions
 Linux (.rpm)	Red Hat Enterprise Linux CentOS Fedora OpenSUSE SUSE Amazon Linux Oracle Enterprise Linux	Install instructions
 Linux (.deb)	Debian Ubuntu	Install instructions
 Mac (.pkg)	OS X	Install instructions
 AIX (.rpm)	IBM AIX	Install instructions

[Looking for more details?](#)

[Close](#)

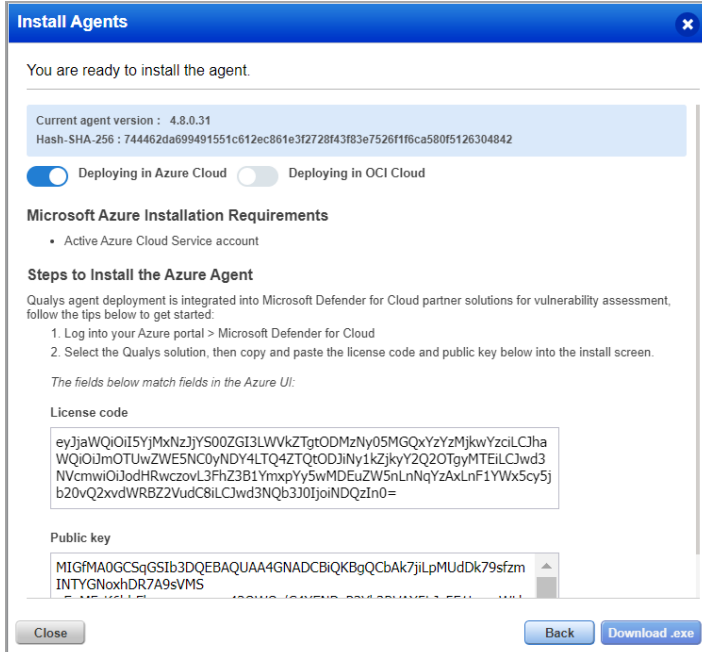

Install Agents

You are ready to install the agent.

Current agent version : 4.8.0.31
Hash-SHA-256 : 744462da699491551c612ec861e312728f43f83e7526f1f6ca580f5126304842

☒ Deploying in Azure Cloud ☐ Deploying in OCI Cloud

Microsoft Azure Installation Requirements

- Active Azure Cloud Service account

Steps to Install the Azure Agent

Qualys agent deployment is integrated into Microsoft Defender for Cloud partner solutions for vulnerability assessment, follow the tips below to get started:

1. Log into your Azure portal > Microsoft Defender for Cloud
2. Select the Qualys solution, then copy and paste the license code and public key below into the install screen.

The fields below match fields in the Azure UI:

License code

```
eyJjaWQOIi5jMxNzJjYS00ZGI3LWVhZTgtODMzNy05MGQxYzYzMjkwYzciLCJhaWQIOUJmOTUwZWV5NC0yNDY4LTQ4ZTQ0ODJiNy1kZjkyY2Q2OTgyMTEiLCJwd3NVcmwiOiJodHRwczovL3FhZ3B1Ym9yYy5wMDEuZW5nLnNqYzAxLnF1YWx5cy5jb20vQ2xvdWRBZ2VudC8iLCJwd3NQb3J0Ijo1NDQzIn0=
```

Public key

```
MIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQCbAk7jiLpMudDk79sfzmINTYGNoxhDR7A9sVMS
```

[Close](#) [Back](#) [Download .exe](#)

Choose “Deploying in Azure Cloud” and retrieve the keys from the page.

Copy the License Code and Public Key. You’ll need these in the next step when you deploy cloud agents in Azure.

Deploy Cloud Agents in Azure


There are two offerings available for Microsoft Defender for Cloud integrations and each will be covered below:

- Vulnerability Assessment with Qualys Cloud Agent (QCA) (Bring Your Own License (BYOL))
- Microsoft Defender for Cloud Embedded Vulnerability Assessment Powered by Qualys

Vulnerability Assessment with Qualys Cloud Agent

Vulnerability Assessment with Qualys Cloud Agent (QCA) (Bring Your Own License (BYOL)) provides a way to deploy QCA via Microsoft Defender for Cloud. It also provides Auto-deploy of agents on all discovered unprotected VMs in your subscription. This offering is available with both the free and standard tiers of Microsoft Defender for Cloud. For more information, [click here](#).

- 1) Login into the Microsoft Azure portal and navigate to “Microsoft Defender for Cloud”.

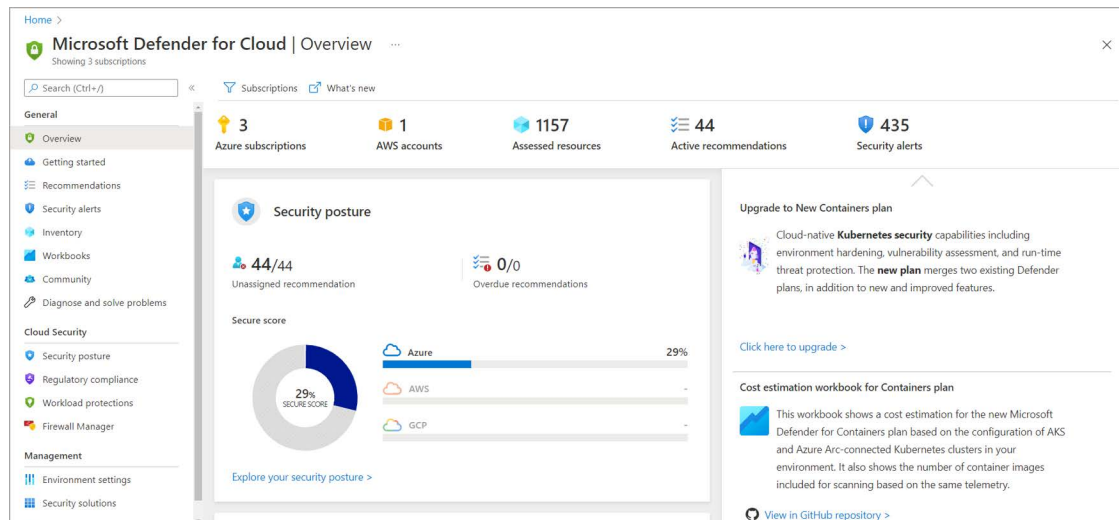

2) Go to Microsoft Defender for Cloud dashboard, click “Recommendations”, then click “Remediate Vulnerabilities” to expand the list of options.

The screenshot shows the Microsoft Defender for Cloud Recommendations dashboard. The left sidebar has the 'Recommendations' section highlighted. The main content area displays a table of recommendations. The 'Remediate vulnerabilities' recommendation is expanded, showing a list of affected resources. The table includes columns for Name, Max score, Current score, Potential score increase, Status, and Unhealthy resources. The 'Remediate vulnerabilities' recommendation is expanded, showing a list of affected resources.

3) Select “Machines should have a vulnerability assessment solution” option.

The screenshot shows the Microsoft Defender for Cloud Recommendations dashboard. The left sidebar has the 'Recommendations' section highlighted. The main content area displays a table of recommendations. The 'Machines should have a vulnerability assessment solution' recommendation is highlighted in the table. The table includes columns for Name, Max score, Current score, Potential score increase, Status, and Unhealthy resources. The 'Machines should have a vulnerability assessment solution' recommendation is highlighted in the table.

The Azure VM resources are displayed.

- Within Affected resources, there are 3 options: Unhealthy resources, Healthy resources and Not applicable resources Azure VM resources.

The Unhealthy resources column lists all the VM resources, without Qualys cloud agent.

4) Select the check box to select all the VM resources and click **Fix** to proceed.

Home > Microsoft Defender for Cloud > Machines should have a vulnerability assessment solution

Exempt View policy definition Open query

Severity: Medium Freshness interval: 24 Hours

Machines should have vulnerability findings resolved Dependent 4 of 4

Remediation steps

Affected resources

Unhealthy resources (16) Healthy resources (29) Not applicable resources (37)

Search VMs & servers

Name	Subscription	Reason	Owner	Due date	Status
<input checked="" type="checkbox"/> demo-jp-vm-01	qlys-demo-corporate	The machine is not onboarded to...			
<input checked="" type="checkbox"/> demothycoticap	qlys-demo-corporate	The machine is not onboarded to...			
<input type="checkbox"/> oc-rhcos-jumphost	qlys-demo-corporate	The machine is not onboarded to...			

Fix Trigger logic app Exempt Assign owner Change owner and set ETA

Was this recommendation useful? Yes No

5) Choose a vulnerability assessment solution.

Microsoft Azure Search resources, services, and docs (6+)

Home > Microsoft Defender for Cloud > Machines should have a vulnerability assessment solution

A vulnerability assessment solution should be enabled on your virtual machines

Fixing demothycoticap, demo-jp-vm-01

Choose a vulnerability assessment solution:

- ☐ Threat and vulnerability management by Microsoft Defender for Endpoint (included with Microsoft Defender for servers)
- ☐ Deploy the integrated vulnerability scanner powered by Qualys (included with Microsoft Defender for servers)
- ☐ Deploy your configured third-party vulnerability scanner (BYOL - requires a separate license)
- ☐ Configure a new third-party vulnerability scanner (BYOL - requires a separate license)

Proceed

To enable an integrated vulnerability scanner - all selected resources should be on Microsoft Defender for servers
To enable Threat and vulnerability management integrated vulnerability scanner - all selected resources should be onboarded to Microsoft Defender for Endpoint

The following options are provided:

Threat and vulnerability management by Microsoft Defender for Endpoint (included with Microsoft Defender for servers): This option will automatically get the threat and vulnerability management findings without the need for additional agents. It is built-in module for Microsoft Defender for Endpoint, threat and vulnerability management.

Deploy the integrated vulnerability scanner powered by Qualys (included with Microsoft Defender for servers): This option is intended for non-Qualys customers who want to leverage the Qualys Vulnerability Assessment via Azure Defender included in the

Microsoft Defender for Cloud. Qualys customers should not choose this option if they want their assessment findings in their Qualys subscription. It is recommended that Qualys customers choose the BYOL solutions. For more details on this solution, [click here](#).

Deploy your configured third-party vulnerability scanner (BYOL - requires a separate license): Choose this option if you already have an existing solution from Qualys. This option will expose vulnerability assessment findings to your Qualys subscription.

Configure a new third-party vulnerability scanner (BYOL - requires a separate license): Choose this option if you want to create a new solution.

6) Select Qualys extension to configure and click **Proceed**.

Microsoft Azure

Home > Microsoft Defender for Cloud > Machines should have a vulnerability assessment solution >

A vulnerability assessment solution should be enabled on your virtual machines

Fixing demothycotcap, demo-jp-vm-01

Choose a vulnerability assessment solution:

- ☐ Threat and vulnerability management by Microsoft Defender for Endpoint (included with Microsoft Defender for servers)
- ☐ Deploy the integrated vulnerability scanner powered by Qualys (included with Microsoft Defender for servers)
- ☐ Deploy your configured third-party vulnerability scanner (BYOL - requires a separate license)
- ☒ Configure a new third-party vulnerability scanner (BYOL - requires a separate license)

Select an extension to configure:

- Rapid7 Inc.**
Configure a new solution
- Qualys, Inc.**
Configure a new solution

Proceed

To enable an integrated vulnerability scanner – all selected resources should be on Microsoft Defender for servers.
To enable Threat and vulnerability management integrated vulnerability scanner – all selected resources should be onboarded to Microsoft Defender for Endpoint

Microsoft Azure

Home > Microsoft Defender for Cloud > Machines should have a vulnerability assessment solution > A vulnerability assessment solution should be enabled on your virtual machines >

Configure Qualys, Inc. vulnerability management solution

Sign up for the solution

Name *

QualysVa1

Subscription

qlys-demo-corporate

Resource group *

Create new

Location *

East US

License code *

Public key *

Auto deploy

On Off

Please note, when creating the VA management, VA agents will be installed on your virtual machines.

OK

Provide the required details.

Name – name for the solution.

Subscription – displays subscription of the solution. If multiple subscriptions are selected, then it will provide drop down menu to select the subscription.

Resource group – Select the required resource group

Location – Select Location


License code – Specify license code retrieved from Qualys subscription.

Public key – Specify public key retrieved from Qualys subscription.

Auto deploy – Automatically installs Qualys cloud agent on Azure resources in the subscription.

Note: For subsequent deployments, choose the solution you just created from the 'Existing Solution' list. The inputs are saved, so you don't need to retrieve the code and key from your Qualys subscription again.

7) Navigate to **Security solutions** to view all of the configured security solutions from Qualys and click **VIEW** on the solution to view the VM resources associated with it.

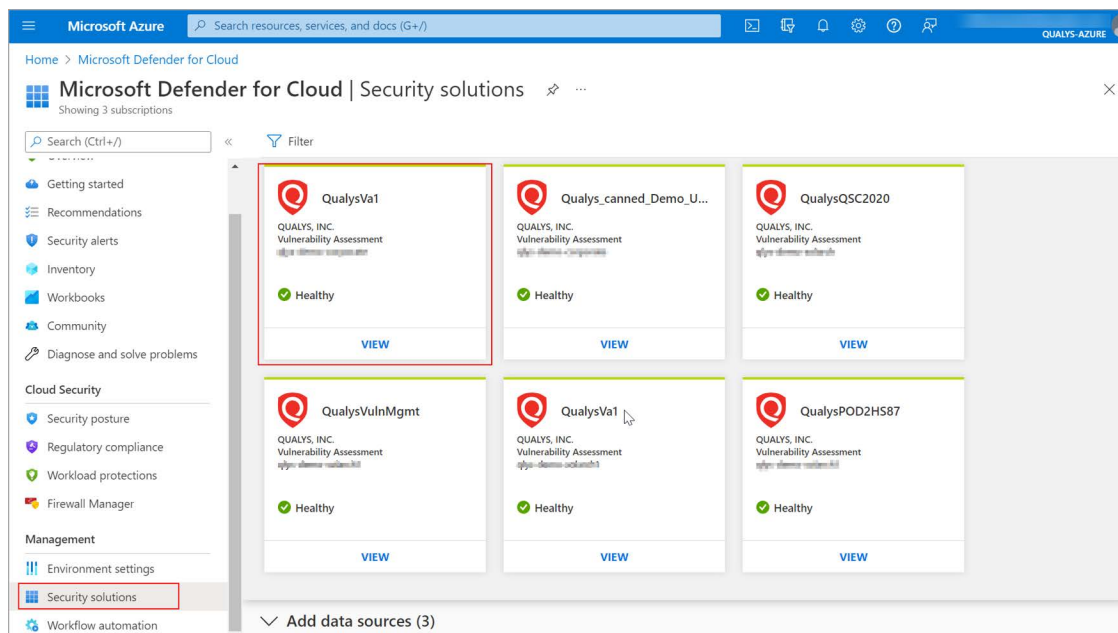

8) Click on the associated resources to see Vulnerability findings for that specific resource.

Home > Microsoft Defender for Cloud > QualysVa1

Solution console Link VM Delete solution Configure

Partner solution name: Qualys for Azure
 Type: Vulnerability Assessment
 Integration mode: Semi-automatically provisioned
 Status: ✔ Healthy
 Subscription: qlyo-demo-corporate
 Resource group: Tahiti-Demo-00-EMEA

Note: Agent status may have up to 8 hours delay

Associated resources

Resource name	Health
Tahiti-Demo-VM-00	▲
Demo-LB-VM00	▲
Demo-VM-VM-05	▲
Tahiti-Demo-VM-05	▲

9) Click **View findings**. All the vulnerability findings from Qualys associated with that VM resource are displayed.

Microsoft Azure Search resources, services, and docs (G+)

Home > Microsoft Defender for Cloud > QualysVa1

Virtual machine security health

[View findings](#) [Unlink VM](#)

Virtual machine info

Virtual machine

All the vulnerability findings from Qualys associated with that VM resource are displayed.

10) Click any of the finding to view detailed description, information, impact, threat and remediation.

The screenshot shows the Microsoft Azure portal interface. On the left, a sidebar displays 'Resource' with a green checkmark and 'Total findings' as 0. Below this is a 'Findings' section with a search bar and a table of findings. The table has columns for 'ID' and 'Security check'. The first finding, ID 91910, is highlighted and corresponds to 'Microsoft SQL Server Remote Code Execution (RCE) Vulnerability for June 2022'. On the right, a detailed view for this finding is shown, titled '91910-Microsoft SQL Server Remote Code E...'. This view includes sections for 'Description', 'General information', 'Threat', and 'Remediation'. The 'General information' section lists details such as ID (91910), Severity (High), Category (Security Solution Finding), Published Time (N/A), Time Generated (7/20/2022, 7:06 PM GMT+5:30), Patchable (N/A), CVSS base score (v2.0: 7.5), CVEs (CVE-2022-29143), and Solution (Qualys (independent license)). The 'Remediation' section advises customers to refer to CVE-2022-29143 for more details.

Retrieve the License Code and Public Key from your Qualys Subscription

1) Login to your Qualys subscription. Navigate to the “Cloud Agent” application from the menu, then select “Activation Keys”.

The screenshot shows the Qualys Enterprise Cloud Agent interface. The top navigation bar includes 'Cloud Agent' and 'Agent Management'. The 'Agent Management' section is active, and the 'Activation Keys' tab is selected. Below the tabs, there is a table of activation keys. The table has columns for 'Activation Key', 'Agents', 'Created', 'Created by', 'Expires', and 'Modules'. One key is listed with the name 'AJM_ASC', 3 agents, created on February 20, 2019, by Alex Mandernack, and it never expires. The interface also shows a 'New Key' button and a '46 activation keys' indicator.

2) Click “New Key” and generate a new activation key. We recommend you handle the Azure cloud deployments via a separate Activation Key. Additionally, manage your departments with separate activation keys. Specify a name to identify it uniquely

(example: Microsoft Defender for Cloud Key) and select Vulnerability Management and/or Policy compliance modules depending on your licenses. We encourage you to have both the solutions to secure your assets in Azure completely.

New Activation Key

Turn help tips: On | Off

Create a new activation key

An activation key is used to install agents. This provides a way to group agents and better manage your account. By default this key is unlimited - it allows you to add any number of agents at any time.

Title

Azure Security Center Key

Select | Create

Azure-Tag

Provision Key for these applications

☒ VM Vulnerability Management
License limit not enforced.

☒ PC Policy Compliance
License limit not enforced.

☐ FIM File Integrity Monitoring
License limit not enforced.

☐ IOC Indication of Compromise
License limit not enforced.

☐ SCA Secure Config Assessment
License limit not enforced.

☐ Set limits

Close

Unlimited KeyGenerate

3) Specify a name to identify it uniquely (example: Microsoft Defender for Cloud Key) and select Vulnerability Management and/or Policy compliance modules depending on your licenses. We encourage you to have both the solutions to secure your assets in Azure completely. Click Generate for new activation key.

New Activation Key Turn help tips: On | Off

New activation key generated successfully

Give your key a name and add tags to easily find agents installed using this key. We'll associate the tags to the agent hosts.

Activation Key [Yellow box with green checkmark]

Key Type Unlimited key

[Download 2.x binaries supporting FIM/IOC/PM](#)

Installation Requirements

	Windows (.exe)	Windows Client Versions Windows Server Versions	Install instructions
	Linux (.rpm)	Red Hat Enterprise Linux CentOS Fedora OpenSUSE SUSE Amazon Linux Oracle Enterprise Linux	Install instructions
	Linux (.deb)	Debian Ubuntu	Install instructions
	Mac (.pkg)	OS X	Install instructions
	AIX (.bff.gz)	IBM AIX	Install instructions

[Close](#)

4) Currently, as a part of this integrated deployment is only available for Windows and Linux agents. (Linux agent support is newly added). Click 'Install Instructions' under Windows or Linux. Choose 'Deploying on Azure' and retrieve the keys from the page.

5) Copy the License code and Public key and use it in during Deploying the agent.

Install Agents

You are ready to install the agent.

Current agent version : 3.0.0.101
Hash-SHA-256 : 1c62590bc7dc12b7782695176ed42c0dfabe75cb0e987f1beb987a150f1253c6

☒ Deploying in Azure Cloud

Microsoft Azure Installation Requirements

- Active Azure Cloud Service account

Steps to Install the Azure Agent

Qualys agent deployment is integrated into Azure Security Center's partner solutions for vulnerability assessment, follow the tips below to get started:

1. Log into your Azure portal > Security Center
2. Select the Qualys solution, then copy and paste the activate code and licence key below into the install screen.

The fields below match fields in the Azure UI:

License code

Public key

Microsoft Defender for Cloud Embedded Vulnerability Assessment Powered by Qualys

Microsoft Defender for Cloud Embedded Vulnerability Assessment Powered by Qualys helps to quickly deploy a Vulnerability Assessment Solution powered by Qualys. No other configurations needed. This offering is available to all Azure customers that are subscribed to the Microsoft Defender for Cloud standard pricing tier.

This solution utilizes the Qualys Cloud Agent that will be deployed to your virtual machines in your Azure subscription. The Vulnerability Assessment findings will be populated into your Microsoft Defender for Cloud Dashboard under recommendations.

1) Login into the Microsoft Azure portal and navigate to “Microsoft Defender for Cloud”. Microsoft Defender for Cloud integrates with Azure services to monitor and protect your Windows and Linux virtual machines.

2) Click “Recommendations”, then click “Enable the built-in vulnerability assessment solution on virtual machines (powered by Qualys)”.

Embedding Qualys Cloud Agent as a part of Golden Machine Image

The Qualys Cloud Agent supports configuration and deployment into cloned images in cloud environments such as Microsoft Azure. For step-by-step procedure, kindly contact your TAM or Qualys Support for “Cloud Agent Technical White Paper”.

Deploy Qualys Cloud Agent via Azure ARM Template

This section helps you to deploy Qualys Cloud Agent using Azure Resource Manager (ARM) template. For more details on deploying Cloud Agent on Windows VM or Linux VM using Azure Portal, see [Qualys Cloud Agent installation using Azure Resource Manager \(ARM\) template](#).

Using Powershell

```
PS C:\ New-AzureRmResourceGroupDeployment -VMName VM_NAME -
ResourceGroupName RESOURCE_GROUP_NAME -Location VM_LOCATION -
TemplateFile TEMPLATE_FILE_PATH -TemplateParameterFile
TEMPLATE_PARAMETER_FILE_PATH
```

where,

TEMPLATE_FILE_PATH = the path of the template file

TEMPLATE_PARAMETER_FILE_PATH = the path of parameter file for the template

Input Parameters: Use the example.parameters.json from the repository to supply the parameters field.

- vmName: The name of the Virtual Machine where you want to install Qualys Cloud Agent
- vmlocation: The location of the Virtual Machine
- LicenseCode: The License Code from your Qualys Subscription

Deploy Qualys Cloud Agent via Other Tool Sets

Qualys Cloud Agent can be deployed via automation, orchestration or configuration management tools sets in your environment, for example, Ansible, Chef, and Puppet. Qualys provides a template for deploying Qualys Cloud Agent via Ansible. This can be used by customers to deploy and configure Qualys Cloud Agent in their Azure environment.

Ansible

This section helps you to deploy Qualys Cloud Agent using Ansible-Playbook.

The playbook InstallQCA.yml can be used to deploy Qualys Cloud Agent across the assets included in your “host” file. Additionally, you can use the tags to deploy Qualys Cloud Agent on your virtual machines. Refer [Cloud Agent Ansible](#) for github example.

The required input parameters are:

- private-key = private-key to access the virtual machines (Ansible works via SSH)
- ssh_user = username to login into the instance

- URL = the URL where the file is hosted For example: Webserver, S3, Blob Storage, Cloud Storage
- ActivationID = An ID that provides a way to group agents and bind them to your account
- CustomerID = An ID to identify your account

Azure Automation Cloud Agent

This section help you to deploy Qualys Cloud Agent in Azure Virtual Machine (VM) using Azure Automation and Run command.

The powershell script “qcainstall.ps1” logs into the Azure subscription and locates all the Resource Groups in it. Crawling each Resource Groups, it locates VMs inside them. With the help of Azure Run command “Invoke-AzureRmVMRunCommand”, it downloads the script to install Qualys Cloud Agent based on Operating System (OS) of the VM.

Pre-requisites: You should have an Azure automation account and an Automation connection asset named "AzureRunAsConnection" in that Azure automation account.

Note: This script only works on powershell version 2 and above. It specifically not works for V5 core due to unavailability of Invoke-webrequest cmdlet. You can opt for the alternatives.

Usage:

- 1) Create variables named ContainerName, StorageAccountName, StorageAccountKey.

The screenshot shows the 'testmikaa - Variables' page in the Azure portal. The left sidebar lists navigation options: Python 2 packages, Credentials, Connections, Certificates, and Variables (selected). The main area displays a table of variables.

NAME	TYPE	VALUE	LAST MODIFIED
ContainerName	String	[REDACTED]	12/18/2018, 11:18 AM
StorageAccountKey	Unknown (encrypted)	*****	12/18/2018, 11:19 AM
StorageAccountName	String	[REDACTED]	12/18/2018, 11:18 AM

- 2) Copy the executables files (Qualys Cloud Agent exe, rpm or deb files) and upload it to the Blob storage that is publicly accessible.

The screenshot shows the 'testmikconpub' container page in the Azure portal. The left sidebar lists navigation options: Overview (selected), Access Control (IAM), Settings, Properties, and Metadata. The main area displays a table of blobs.

NAME	MODIFIED	ACCESS TIER	BLOB TYPE	SIZE	LEASE STATE
qualys-cloud-agent.x86_64.qg2.deb	12/18/2018, 1:32:34 PM	Cool (Infe...	Block blob	3.67 MiB	Available
qualys-cloud-agent.x86_64.qg2.rpm	12/18/2018, 1:32:33 PM	Cool (Infe...	Block blob	3.65 MiB	Available
QualysCloudAgent.exe	12/18/2018, 1:32:34 PM	Cool (Infe...	Block blob	7.04 MiB	Available

3) Repeat the steps 1 and 2 for scripts LinuxQCA.sh and WindowsQCA.ps1 and store it in Blob storage referred by variables created in step 1 and let it be private.

testmikcon
Container

Search (Ctrl+/)

Upload Refresh Delete Acquire lease Break lease View snapshots Create snapshots

Location: testmikcon

Search blobs by prefix (case-sensitive) ☐ Show deleted blobs

NAME	MODIFIED	ACCESS TIER	BLOB TYPE	SIZE	LEASE STATE
LinuxQCA.sh	12/18/2018, 1:44:31 PM	Cool (Infe...	Block blob	2.09 KiB	Available
WindowsQCA.ps1	12/18/2018, 10:22:16 AM	Cool (Infe...	Block blob	1.09 KiB	Available

4) Import the main script named qcainstall.ps1 into Azure automation runbook and edit the variables and Save and publish it. ActivationId, CustomerId, url_rpm, url_deb.

Dashboard > testmikrg > testmikaa - Runbooks

testmikaa - Runbooks
Automation Account

Search (Ctrl+/)

+ Add a runbook Browse gallery Learn more Refresh

Search runbooks...

NAME	AUTHORING STATUS	LAST MODIFIED
AzureAutomationTutorial	✓ Published	12/18/2018, 10:18 AM
AzureAutomationTutorialPython2	✓ Published	12/18/2018, 10:18 AM
AzureAutomationTutorialScript	✓ Published	12/18/2018, 10:18 AM
AzureClassicAutomationTutorial	✓ Published	12/18/2018, 10:18 AM
AzureClassicAutomationTutorial...	✓ Published	12/18/2018, 10:18 AM
qcainstall	✓ Published	12/18/2018, 12:20 PM

5) Start the Runbook.

qcainstall
Runbook

Search (Ctrl+/)

Start View Edit Schedule Webhook Delete Export Refresh

Start Runbook

Are you sure that you want to start the runbook 'qcainstall'?

Runbook type: PowerShell Runbook Last modified: 12/18/2018, 12:20 PM

Tags (change)
[Click here to add tags](#)

Scan Assets


This section helps to understand the steps to scan your network. Before you initiate your scan, you must ensure few check points/pre-configurations.







Azure Scan Checklist

We recommend these steps before scanning.

- [Check Appliance Status](#)
- [Configure OS Authentication](#)
- [Configure security groups for the Azure virtual machines to be scanned](#)

Check Appliance Status

Go to VM/VMDR > Scans > Appliances - Be sure the new Scanner Appliance is connected to the Qualys Cloud Platform.  means your appliance is connected and ready for scanning.

Scans							
Scans Maps Schedules Appliances Option Profiles Authentication Search Lists Setup							
New	Search	1 - 27 of 27					
Appliance	ID	LAN IP	WAN IP	Polling	Scanner	Signatures	Last Update
  vpc90-scr2	15465835141830	10.90.2.100	--	180 seconds	9.2.33-1	2.4.17-3	04/14/2017 at 05:10:08 (GMT+0530) 
  vpc90-scr1	15491710005768	10.90.2.30	--	180 seconds	9.2.33-1	2.4.17-3	04/14/2017 at 03:46:28 (GMT+0530) 

Configure OS Authentication

Using host OS authentication (trusted scanning) allows our service to log in to each target system during scanning. Running authenticated scans gives you the most accurate results with fewer false positives.


Go to Scans > Option Profiles. Edit the profile Initial Options, use Save As to save a copy with another name. In your new profile enable the authentication types you'll need.

Authentication

Authentication enables the scanner to log into hosts at scan time to extend detection capabilities. See the online help to learn how to configure this option.

- ☒ Windows
- ☒ Unix/Cisco
- ☐ Oracle
- ☐ Oracle Listener
- ☐ SNMP
- ☐ VMware
- ☐ DB2
- ☐ HTTP
- ☐ MySQL

Go to Scans > Authentication. Add authentication records for the Azure virtual machines you'll be scanning - Unix and/or Windows. In the record you'll need to add credentials for the account to be used for authentication - this is an account for OS user (not the AIM user). We recommend you create a dedicated account for authentication on target systems.

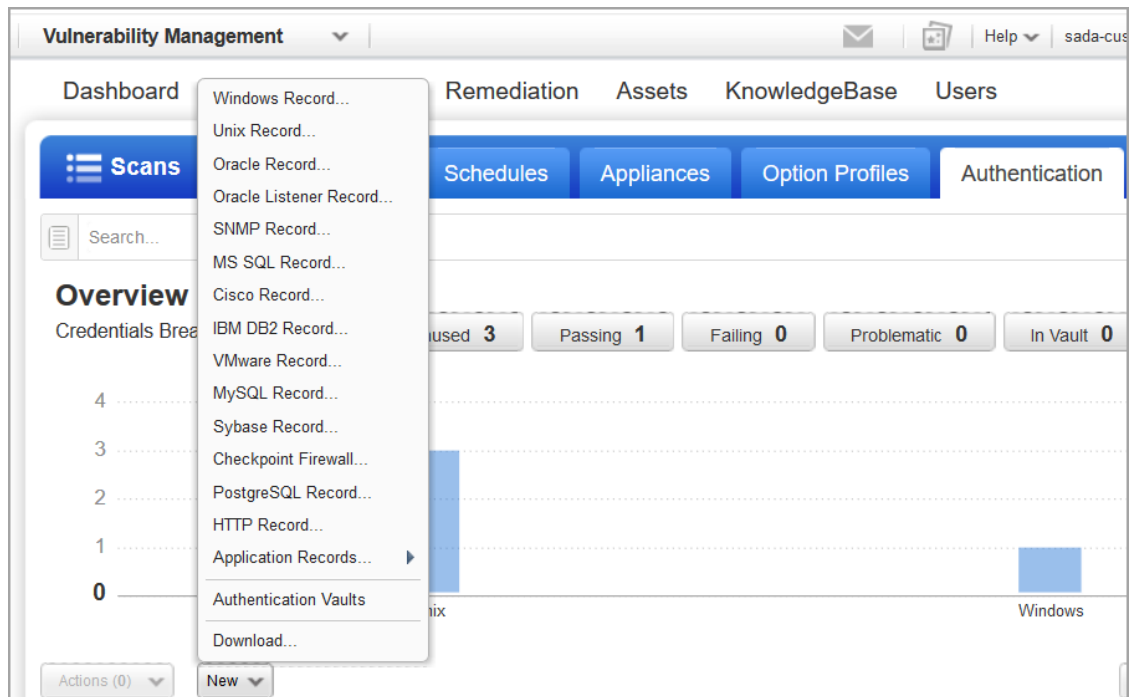

Sample Unix Record

1) Login Credentials - Provide OS user name and select Skip Password.

The screenshot shows the 'Edit Unix Record' form in the Qualys interface. The 'Authentication' tab is selected. The form includes a sidebar with options: Record Title, Login Credentials (selected), Private Keys / Certificates, Root Delegation, Qualys Shell, Policy Compliance Ports, IPs, and Comments. The main content area for 'Authentication' contains the following fields and options:

- Record Title: **Authentication**
- Provide login credentials to use for authenticated scanning. You have the option to get the login password from a vault available in your account.
- Username*:
- Get password from vault: ☐
- ☒ Skip Password
- Password:
- ☐ Clear Text Password
- Confirm Password*:

2) Private Keys - Key authentication recommended. Select key type (RSA, DSA, ECDSA, ED25519) and enter your private key content.



Private Key / Certificate

Set private key / certificate for your Unix record

Get private key from vault: ☐ NO


Private Key Type:

Private Key Content:

***** Private Key Installed *****

Paste the private-key content into the space provided. See [Help](#) for more details.

3) IPs - Select Unix IP addresses/ranges of your Azure virtual machines for this record. Credentials in this record are used to scan these assets.

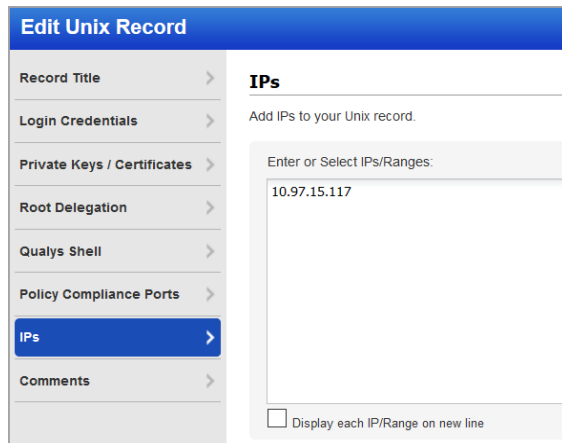

Edit Unix Record

Record Title > **IPs**

Login Credentials > Add IPs to your Unix record.

Private Keys / Certificates >

Root Delegation >

Qualys Shell >

Policy Compliance Ports >

IPs >

Comments >

Enter or Select IPs/Ranges:

10.97.15.117

☐ Display each IP/Range on new line

Sample Windows Record

1) Login Credentials - Provide OS user name and select Skip Password.

The screenshot shows the 'Edit Windows Record' interface with the 'Login Credentials' tab selected. The left sidebar contains links for 'Record Title', 'Login Credentials', 'IPs', and 'Comments'. The main content area is titled 'Login Credentials' and includes sections for 'Windows Authentication' (with 'Local' selected), 'Login' (with 'Basic authentication' selected), and 'Choose Authentication Protocols' (with 'NTLMv2' selected). The 'Login' section contains input fields for 'User Name' (admin), 'Password' (masked), and 'Confirm Password'.

Edit Windows Record Launch Help

Record Title > **Login Credentials**

Login Credentials >

IPs >

Comments >

Windows Authentication

☒ Local
☐ Domain

Login

Use the basic login credential or choose to use authentication vault for authenticated scanning.

☒ Basic authentication ☐ Authentication Vault

User Name: *

Password:

Confirm Password:

Choose Authentication Protocols

We'll attempt authentication to target hosts using the authentication protocols you select below, in the order listed.

☒ NTLMv2
☐ NTLMv1

2) IPs - Select Windows IP addresses/ranges of your Azure virtual machines for this record. Credentials in this record are used to scan these assets.

The screenshot shows the 'Edit Windows Record' interface with the 'IPs' tab selected. The left sidebar contains links for 'Record Title', 'Login Credentials', 'IPs', and 'Comments'. The main content area is titled 'IPs' and includes a text input field for 'Enter or Select IPs/Ranges' with the value '10.1.0.133, 10.1.1.108'. There are links for 'Select IPs/Ranges', 'Select Asset Group', 'Remove', and 'Clear'. A checkbox at the bottom is labeled 'Display each IP/Range on new line'.

Edit Windows Record Launch Help

Record Title > **IPs**

Login Credentials >

IPs >

Comments >

Add IPs to your Windows record.

Enter or Select IPs/Ranges: Select IPs/Ranges | Select Asset Group | Remove | Clear

10.1.0.133, 10.1.1.108

☐ Display each IP/Range on new line

Learn more about OS authentication

Online help within the authentication record workflows provides detailed instructions and guidance on all available options. These documents are good resources

[Qualys Windows Authentication Guide \(pdf\)](#)

[Qualys Unix Authentication Guide \(pdf\)](#)

Configure security groups for the Azure virtual machines to be scanned

In Azure, you must associate a security group that allows inbound access on all ports for the IP address of the scanner appliance or the security group of the scanner appliance.

Tips and Best Practices

Have Qualys Defined Networks? Move your Virtual Appliance

This step is recommended if you've defined custom networks in your Qualys account.

By default a new Virtual Scanner Appliance is placed in the Global Default Network and when a scan is performed, host scan data is added to that network. We recommend you move this Virtual Appliance to the desired network before scanning a custom network.

Go to Assets > Networks, edit the network you want to move the Virtual Appliance to and add the appliance to that network.

Internal Scanning using Virtual Scanner Appliance

Scanning with pre-authorized scanner appliance involves following sequence of steps.

1) Create a dynamic tag with Cloud Asset Search filters under "AssetView" app based on your requirements.

For example:

All running VMs in your Qualys Subscription: **azure.vm.state:"RUNNING"**

All running VMs in your Azure Subscription: **azure.vm.subscriptionId:<your Azure Subscription Id> and azure.vm.state:"RUNNING"**

All running VMs in a location: **azure.vm.state:"RUNNING" and azure.vm.location:westus**


All running VMs in a resource group: **azure.vm.state:"RUNNING" and azure.vm.resourceGroupName:testRG**

2) Extract IP addresses of machines returned by tags created in above step. You can extract it using Download or API Query to Host Assets.

3) Add these IP addresses grouped as Asset Groups or individually as Host Assets under Assets tab in VM/VMDR.

4) [Configure OS Authentication](#) records.

5) Now, let's start scanning. Go to VM/VMDR > Scans > Scans > New > Scan (or Schedule Scan).

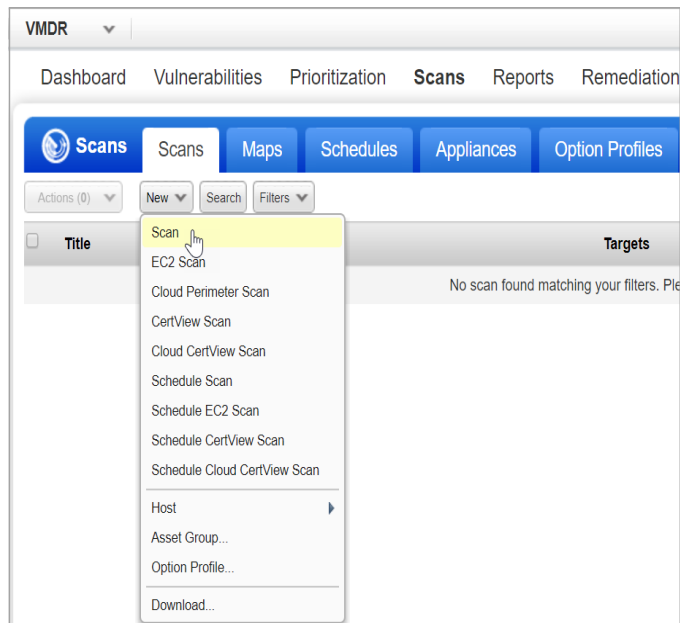

6) Identify your scan target. Click Assets to select a combination of asset groups and IP addresses to scan or click Tags to select one or more asset tags to scan.

General Information

Give your scan a name, select a scan profile (a default is selected for you with recommended settings), and choose a scanner from the Scanner Appliance menu for internal scans, if visible.

Title:

Option Profile: * [Select](#)

Processing Priority:

Network:

Scanner Appliance: [View](#)

Choose Target Hosts from

Tell us which hosts (IP addresses) you want to scan.

☒ Assets ☐ Tags

Asset Groups [Select](#)

IPs/Ranges [Select](#)

Example: fe80::912e:21f6:887e:fff1, fe80::912e:21f6:887e:fff2

Exclude IPs/Ranges [Select](#)

Example: fe80::912e:21f6:887e:fff1, fe80::912e:21f6:887e:fff2

7) That's it - just click Launch and you're done!

Internal Network Scanning using Qualys Cloud Agent

Using our revolutionary Qualys Cloud Agent platform you can deploy lightweight cloud agents to continuously assess your Azure infrastructure for security and compliance.

Cloud Agent features

- Communicates to the Qualys Cloud Platform over port 443 and supports Proxy configurations.
- Supports scanning a range of Linux and Windows OS versions

We recommend these resources

[Qualys Cloud Platform](#)

[Qualys Cloud Agent Getting Started Guide](#)

Get Started

Navigate to the Cloud Agent (CA) app and install the Cloud Agent in minutes

The screenshot displays the Qualys Enterprise Cloud Agent interface. The top navigation bar includes the Qualys logo and 'Enterprise'. Below it, a dropdown menu shows 'Cloud Agent'. The main content area has tabs for 'Dashboard' and 'Agent Management'. Under 'Agent Management', there are sub-tabs: 'Agent Management', 'Agents', 'Activation Keys', and 'Configuration Profiles'. The 'Activation Keys' tab is active. On the left, there's a 'Saved Searches' section with a search bar and a list of actions: 'Actions (0)', 'Install New Agent', and 'Activation Jobs'. A callout box points to 'Install New Agent' with the text: 'Install New Agent to deploy directly on the instance or embed into the AMIs'. Another callout box points to the 'Activation Keys' tab with the text: 'Assign key and activate for applications (VM, PC, etc)'. The 'New Activation Key' dialog is open, showing a form to create a new activation key. It includes a title field with 'AzureAGENT', a description field with 'Azure', and a 'Provision Key for these applications' section with a checkbox for 'AI' and the text 'Asset Inventory Licenses managed by AI.'.

Qualys. Enterprise

Cloud Agent

Dashboard Agent Management

Agent Management Agents Activation Keys Configuration Profiles

Saved Searches

Search...

Actions (0) Install New Agent Activation Jobs

Install New Agent to deploy directly on the instance or embed into the AMIs

Assign key and activate for applications (VM, PC, etc)

New Activation Key

Turn help tips: On | Off

Create a new activation key

An activation key is used to install agents. This provides a way to group agents and better manage your account. By default this key is unlimited - it allows you to add any number of agents at any time.

Title AzureAGENT

Select | Create

Azure x

Provision Key for these applications

☒ AI Asset Inventory Licenses managed by AI.

Perimeter Scanning using Qualys External Scanners

We provide the ability to scan public facing virtual machines in your Azure cloud environment using Cloud Perimeter Scanning for VM and PC.

Qualys External Scanners (Internet Remote Scanners), located at the Qualys Cloud Platform are used for Perimeter Scanning of Azure virtual machines. For subscriptions on Private Cloud Platforms, your account may be configured to allow internal scanners to be used.

These are DNS or IP -based scans launched using the public DNS or Public IP of the target virtual machines. If both public DNS and public IP address exist for your virtual machines, then we will launch a scan on public DNS.

Requirements

- The “Cloud Perimeter Azure VM Scan” feature must be enabled for your subscription. Please reach out to your Technical Account Manager or Qualys Support to enable this feature. You’ll also need these features enabled: Cloud Perimeter Scanning, EC2 Scanning, Scan by Hostname.
- Cloud perimeter scans are available for VM and PC modules. Only Managers and Unit Managers have permission to configure cloud perimeter scans.
- We allow you to create/update a cloud perimeter scan job through Cloud Perimeter Scan API even if no scan targets are resolved from the provided details. At the time of scan, if no scan targets are resolved from the provided details, the scan will not be launched, and we add the error in the Activity log and Run history of the schedule scan job.

Get Started

All cloud perimeter scans are scheduled - either for “now” (a one-time scan job) or “recurring”. Once saved, you’ll see the scan job on the Schedules list. When the scan job starts it will appear on your Scans list.

1) Create a dynamic tag with Cloud Asset Search filters under “AssetView” app based on your requirements.

For example:


All running public VMs in your Qualys Subscription: **not azure.vm.publicIpAddress is null and azure.vm.state:"RUNNING"**

All running public VMs in your Azure Subscription: **not azure.vm.publicIpAddress is null and azure.vm.subscriptionId: and azure.vm.state:"RUNNING"**


All running public VMs in a location: **not azure.vm.publicIpAddress is null and azure.vm.state:"RUNNING" and azure.vm.location:westus**

All running public VMs in a resource group: **not azure.vm.publicIpAddress is null and azure.vm.state:"RUNNING" and azure.vm.resourceGroupName:testRG**

2) Now, let's start scanning. Go to VM/VMDR for a vulnerability scan (or PC for a compliance scan) and choose New > Cloud Perimeter Scan. You'll also see this option on the Schedules tab.

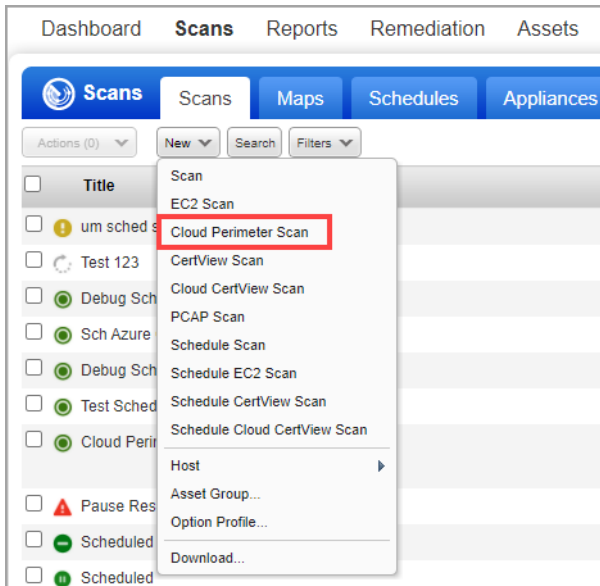

3) In the Cloud Information tab, select the Azure icon to scan the Azure VM machines and click **Continue**.

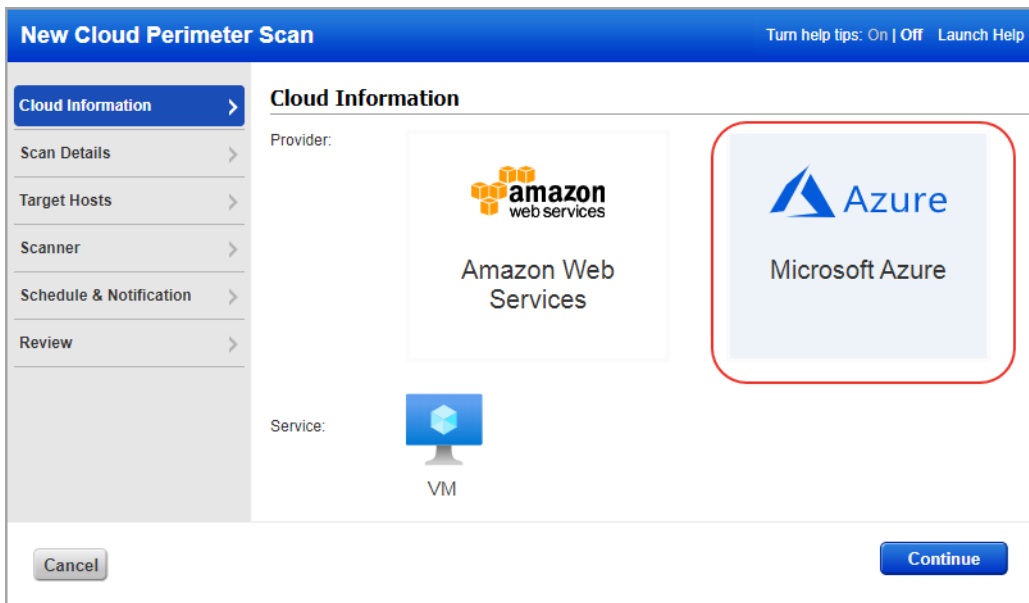

Note: While updating the scan, you cannot change the Provider. We populate the values you selected at the time of creating the scan in Scan option profile settings.

4) Go to the **Scan Details** tab and give the scan a name and select the option profile and priority.

5) Go to the **Target Hosts** tab to select the public facing Azure VM machines on which you want to run the Cloud Perimeter scan. From the **Connectors** drop-down, select an Azure connector.

The Connector drop-down lists the connectors that you have configured in AssetView. Select asset tags to further filter the Azure VM assets fetched from the Azure connector.

Note: The selected asset tag will scope the selected connectors assets and will not scan assets from under other connectors or non-connector based assets.

For Azure VM scan, we do not support pulling load balancer DNS names from the TotalCloud application.

6) Go to the Scanner and Schedule & Notification tabs to select the External/Internal scanner and schedule the scans.

Note: By default, the external scanner appliance is selected. If internal scanner is enabled for cloud perimeter scan in your subscription, only then we allow you to select an internal scanner for the scan.

We allow you to select internal scanner for the scan if using internal scanners for cloud perimeter scan is enabled for your subscription.

7) Go to the Review tab. In the Target Hosts section, we will show you:

- how many public facing Azure VM assets are fetched from the connector,
- assets that are qualified for the scan and
- out of the qualified assets, how many assets are activated in VM on which the scan will be launched.

New Cloud Perimeter Scan

Turn help tips: On | Off Launch Help

Cloud Information

Scan Details

Target Hosts

Scanner

Schedule & Notification

Review

Please review the information and Schedule the scan

Cloud Information

Provider:

AZURE

Connector*:

QWEB Azure Connector

Service:

VM

Scan Details

Title*:

Cloud Perimeter Scan 20200817-112420

Option Profile*:

Initial Options (default)

Scan Priority:

0 - No Priority

Target Hosts

Load balancers DNS list:

-

Assets Identified/Synched from Connector:

23

Assets Qualified for scan:

9

Assets Submitted to scan:

8

Scanner

Scanner Appliance:

External

Cancel


Submit Scan Job

8) Finally, submit the scan job.

The VM assessment results from Azure perimeter scans will be tracked to the virtual machine ID tracked asset. As a part of the scan option profile, the scanner tries to reach out the IPs and try to get to the virtual machines.

View Azure VM Tracked Host Assets in Host Assets

Go to Assets > Host Assets > Filters to search for the Azure VM tracked assets.

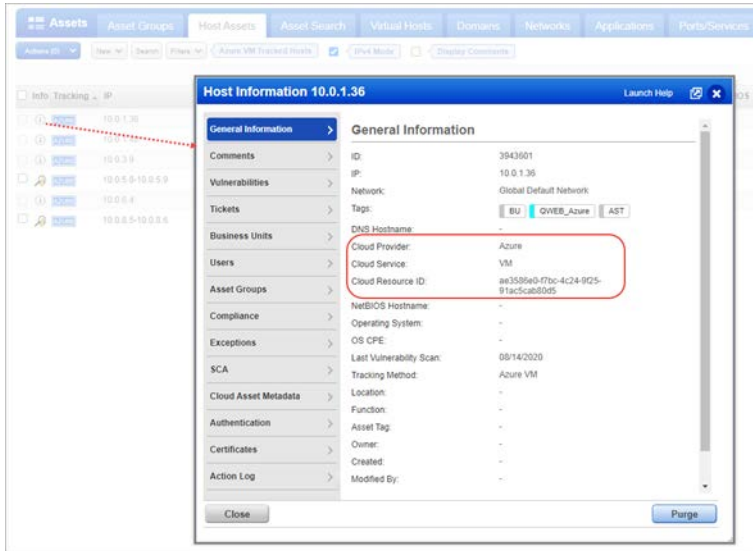

Click the info button to view the cloud provider name (which is Azure for Azure VM assets), cloud service name (VM for Azure VM assets), and resource ID for the Azure Virtual Machine in the Host Information screen. The Cloud Asset Metadata tab shows the metadata information for the host.

Cloud Security Posture Management


This section describes about discovery of cloud inventory such as cloud assets and resources. It also describes about security assessment giving full visibility into the public cloud security posture of all assets and resources.

Cloud Inventory

Qualys Cloud Inventory continuously discovers and tracks assets and resources such as virtual machines, SQL databases, Network security groups, WebApps and others, across all regions and multiple subscriptions in Microsoft Azure and gives you an “at-a-glance” comprehensive picture of your cloud inventory and the location of assets across global regions. You can view all this information in one central place.

Features:

- Provides a quick overview of inventory via pre-built dashboards, and lets you personalize or build your own with custom widgets
- Collects rich metadata for every resource and shows associations across resources, so you can understand scenarios such as what security groups are potentially public and unprotected, and which related assets this is impacting

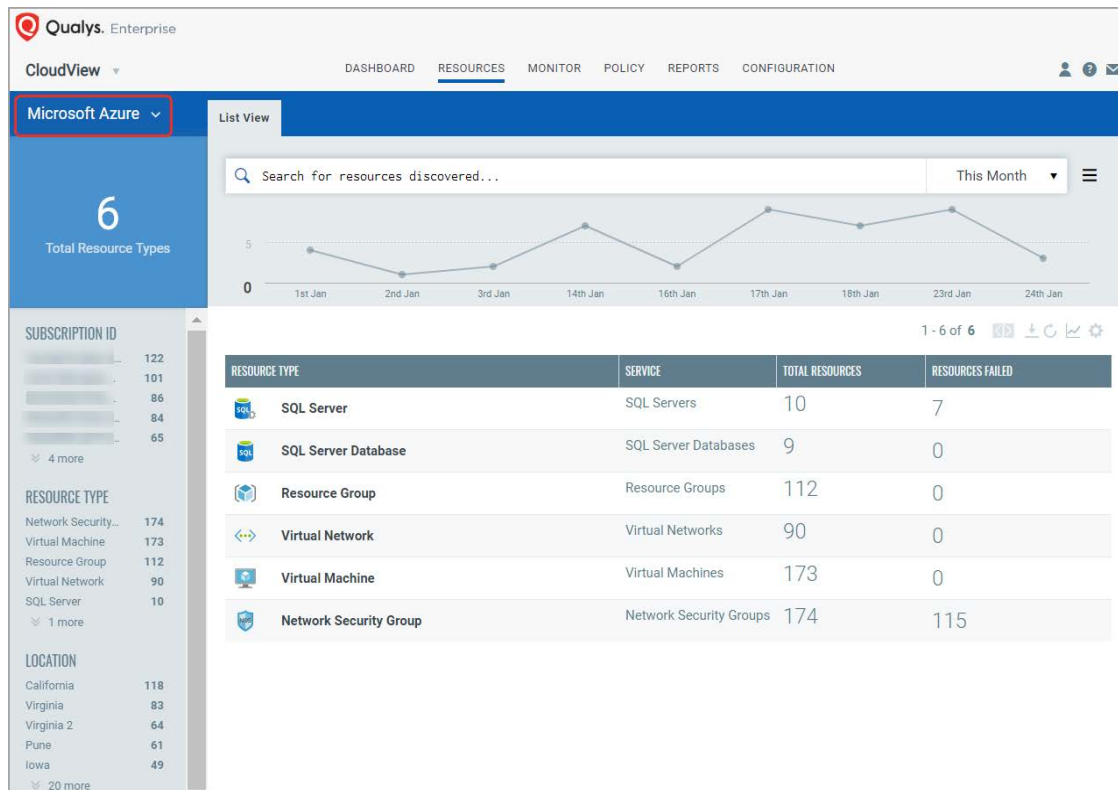


Cloud Security Assessment

Qualys Cloud Security Assessment gives full visibility into the public cloud security posture of all assets and resources. Refer to [TotalCloud Online Help](#) for more details.

Features:


- Provides a quick overview of inventory and security posture via dashboards
- Lets you personalize or build your own with custom widgets based on queries or on other criteria, such as “Top 10 accounts based on failures” and “Top 10 controls that are failing”
- Out of box Azure policies like CIS Microsoft Azure Foundations Benchmark and Azure Best Practices Policy
- Continuously assess and report on resource mis-configurations by checking against the controls from out-of-box policies
- Build your own policies and customize controls to suit your need

- Ability to view, filter and export mis-configurations

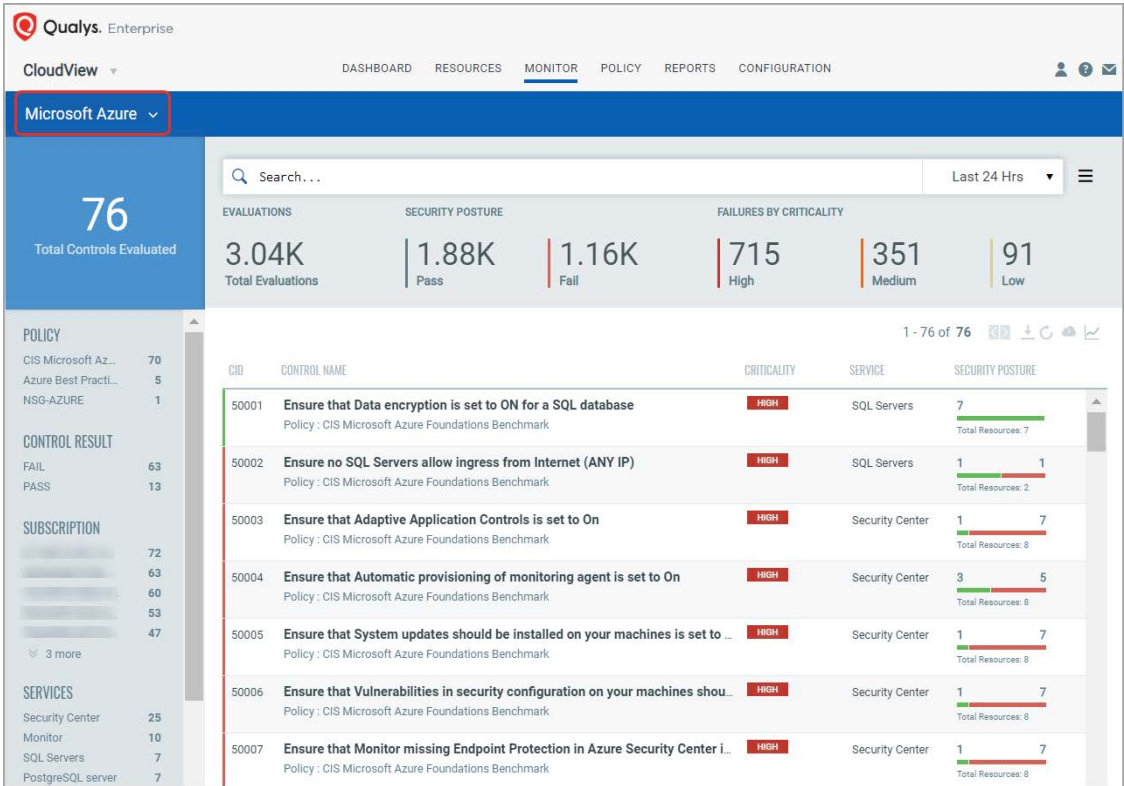

Securing Web Applications

Using Qualys you can secure Applications using Application Scanning and Firewall solutions.

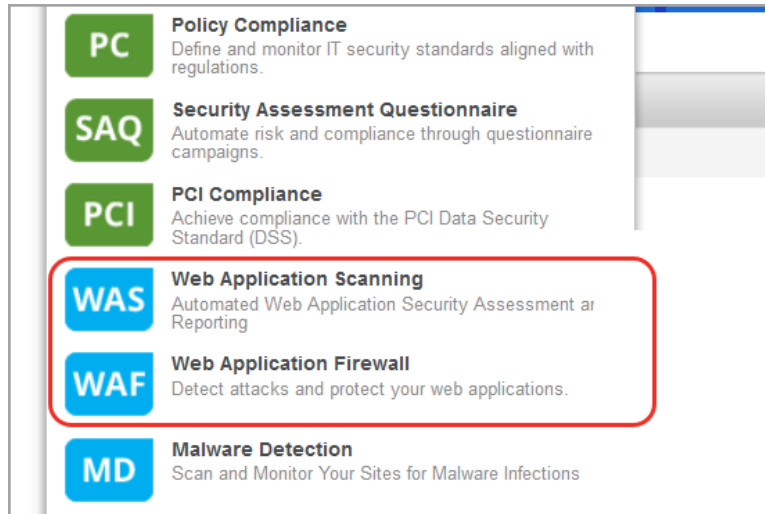

Qualys WAS

Qualys Web Application Scanning (WAS) provides automated crawling and testing of custom web applications to identify application and RESTAPI vulnerabilities including cross site scripting (XSS) and SQL injection. To get started install the Qualys Virtual Scanner Appliance that's pre-authorized by Azure. This is the same appliance used to scan for vulnerabilities and compliance checks.

How do I get started?

- Follow the steps in [Deploying Qualys Scanners \(using CLI\)](#)
- Then review instructions in [Qualys Web Application Scanning Getting Started Guide](#).

Qualys WAF

Protect applications with firewall rules and instant virtual patches using Qualys Web Application Firewall (WAF).

How do I get started?


- Install the Web Application Firewall Appliance available on the Azure
- Then review instructions in [Qualys Web Application Firewall Getting Started Guide](#).

Securing Containers

Qualys Container Security provides discovery, tracking and continuously protecting container environments. This addresses vulnerability management for images and containers in their DevOps pipeline and deployments across cloud and on-premise environments.

Qualys Container Security supports:

- Discovery, inventory and near-real time tracking of container environments
- Vulnerability analysis for images and containers
- Vulnerability analysis for registries
- Integration with CI/CD pipeline using Jenkins/Bamboo Plugins or REST APIs (DevOps flow)

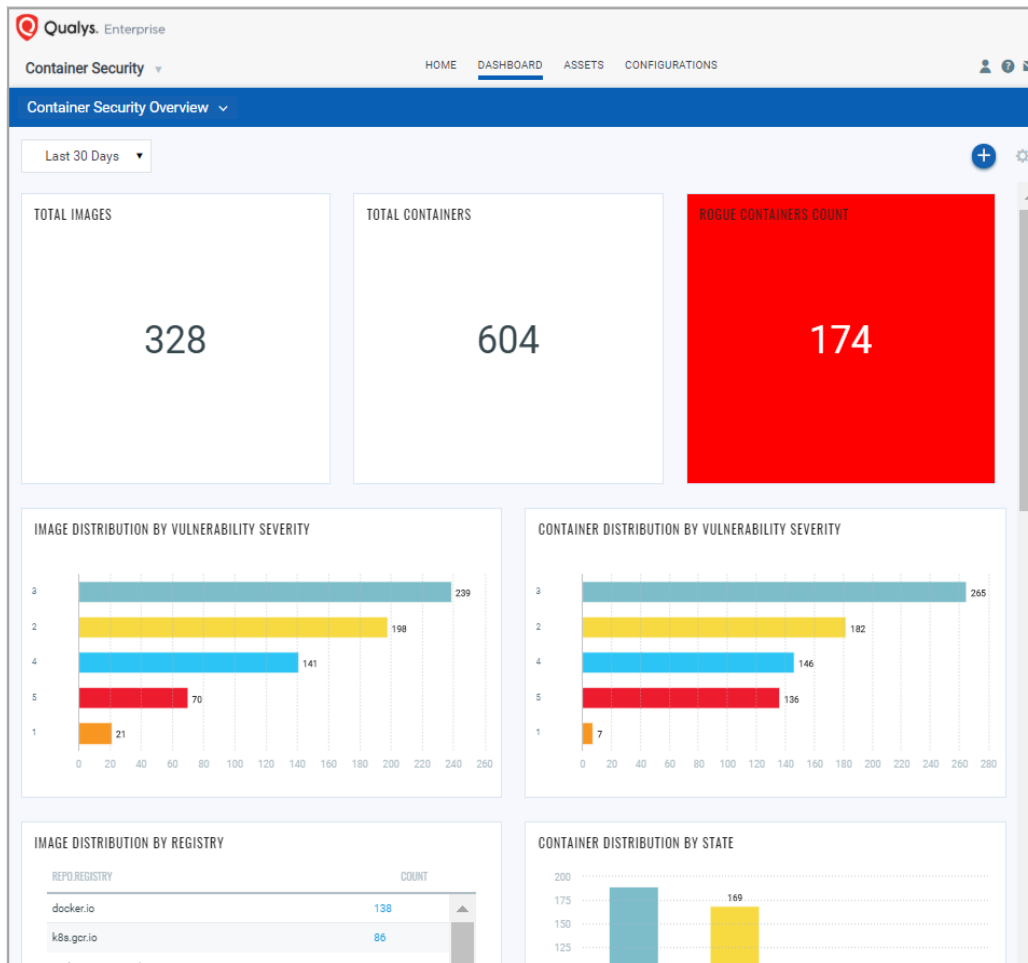

Refer [Qualys Container Security User Guide](#) for more details.

Deploying Container Sensor

The sensor from Qualys is designed for native support of Docker environments. Sensor is packaged and delivered as a Docker Image. Download the image and deploy it as a Container alongside with other application containers on the host.

Since they are docker based, the sensor can be deployed into orchestration tool environments like Kubernetes, Mesos or Docker Swarm just like any other application container.


Refer [Qualys Container Security Deployment Guide](#) for more details.

Analyze, Report & Remediate


This section covers - how to query assets, build widgets and dashboards, and then how to generate vulnerability reports on Azure assets.

How to Query Azure Assets

Our advanced search capabilities help you to quickly find all about your assets all in one place. Choose the AssetView app and go to the Assets tab. This is where you'll see an inventory of all your scanned assets. Say you want to find all your Azure assets. Type provider and select Azure from the drop-down menu.

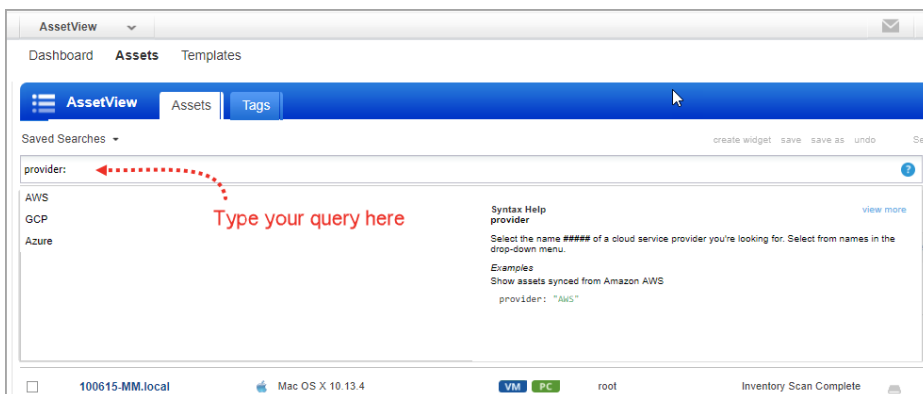


You can search many Azure asset properties. Start typing Azure and you'll see a list Azure asset properties (tokens) you can use to search. Hover over the token name to see syntax help to the right.

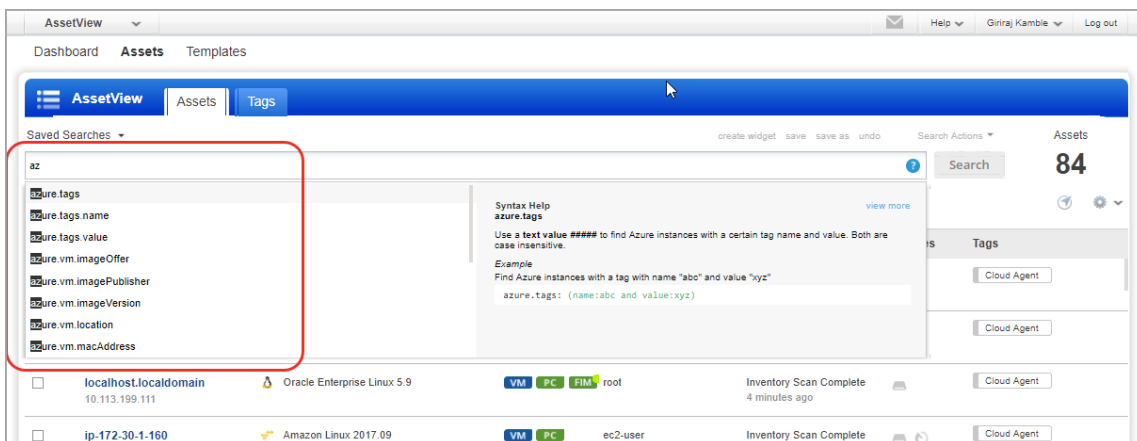


View Asset Details Anytime

The latest vulnerability and compliance data is always available in your assets inventory. Just select the asset name and choose View Asset Details from the quick actions menu.

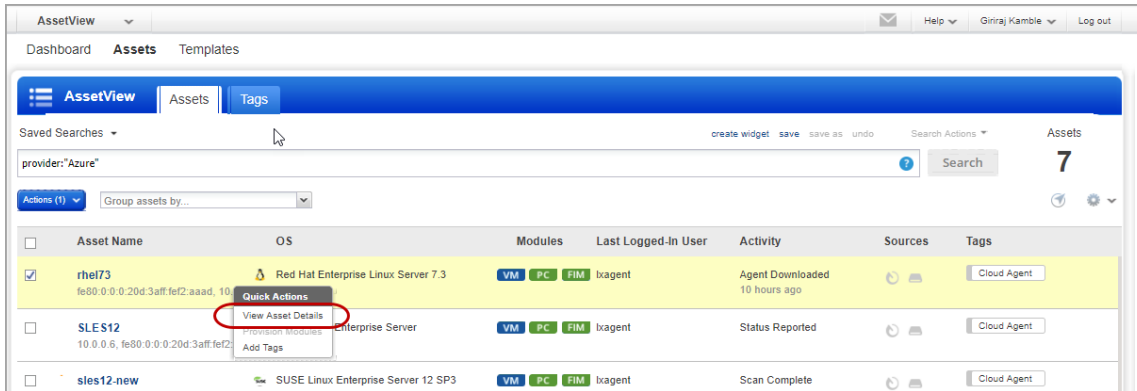


Save Query

Easily save your searches for reuse and share them with other users.

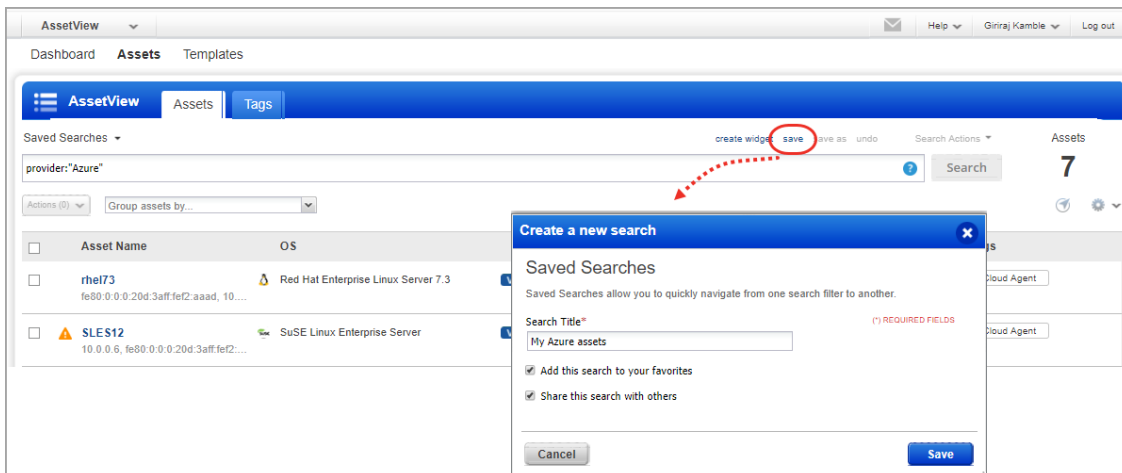

Download and Export Results

It just takes a minute to export search results. Select Download from the Tools menu. Next choose an export format and click Download - choose from multiple formats.

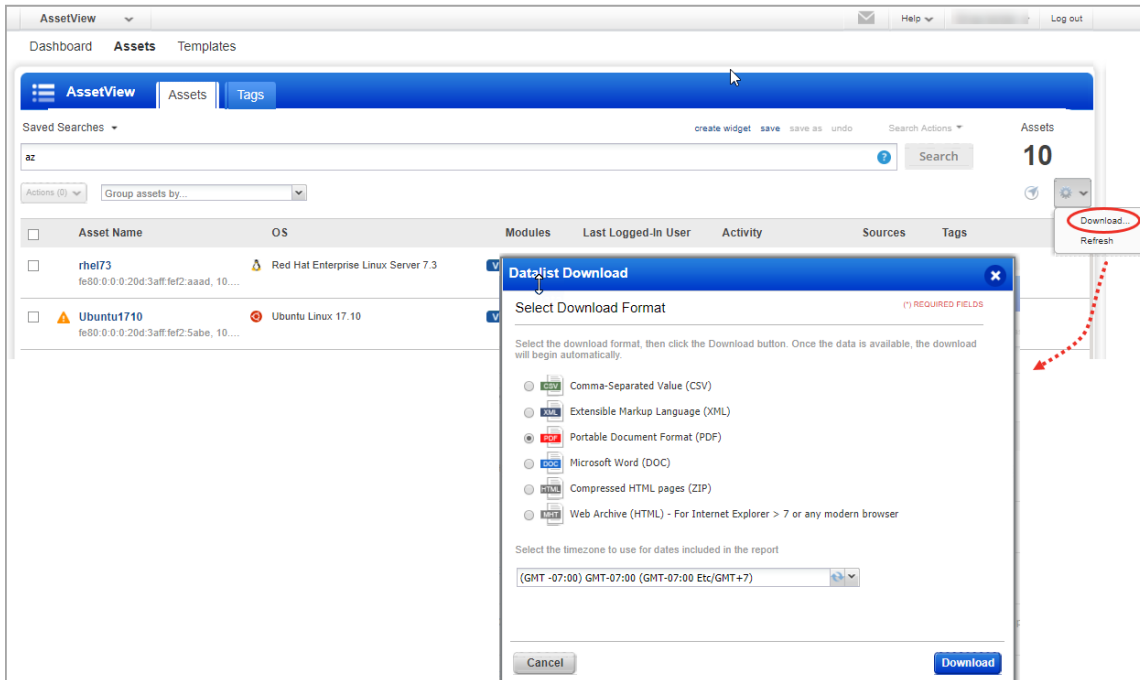


Create Widget

You can create a widget based on your query and add it to your dashboard. For example, first search for Azure assets that have not been scanned for vulnerabilities using Qualys VM for a month. Here's your query:

```
provider:"Azure" AND NOT lastVmScanDate: [now-30d..now-1s]
```


Then choose Create widget. Add a title, you'll see your query is populated for you, just one click to add to your dashboard.

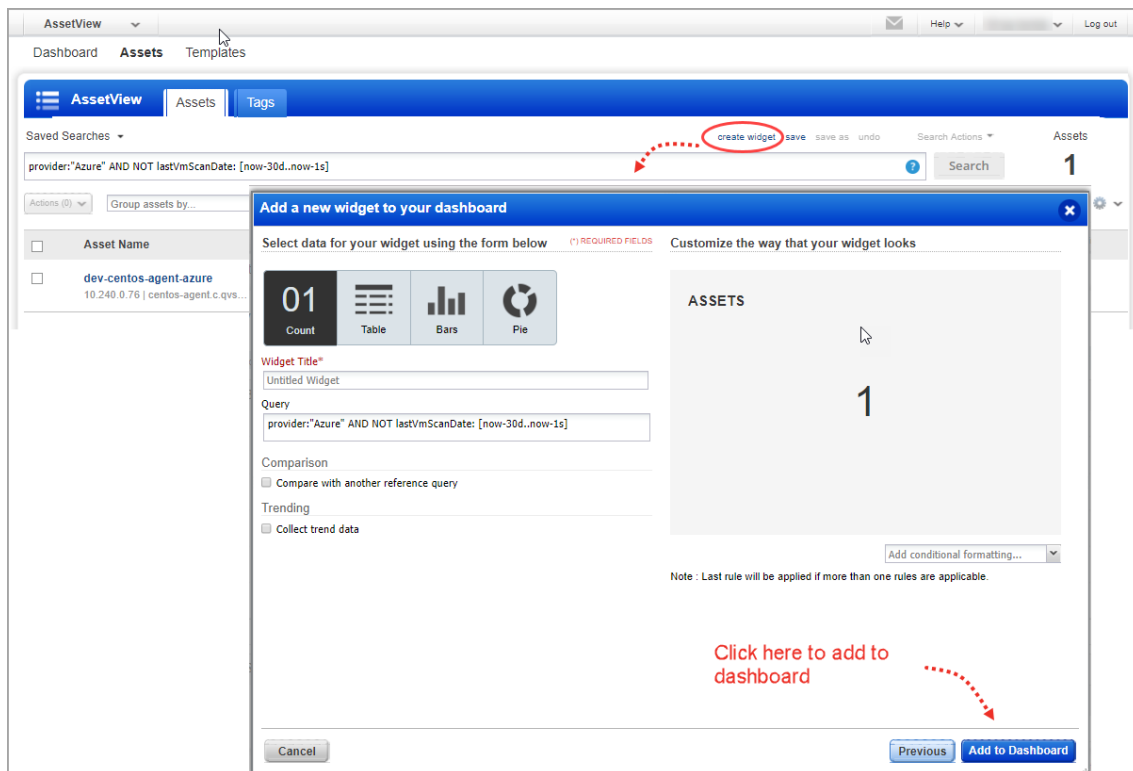

Creating Reports

You can create many different reports on vulnerabilities in the Qualys VM app.

Go to VM/VMDR > Reports > New > Scan Report > Template Based. There are many report templates to choose from, or you can create your own. Try the Technical Report to see full vulnerability details in your report.

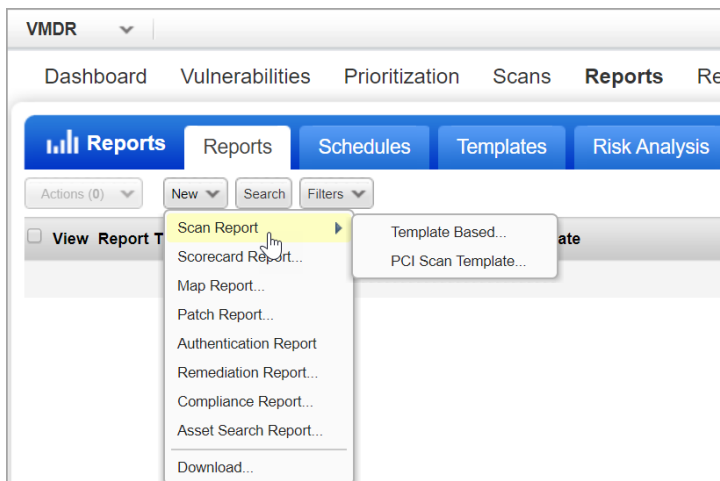


Want to report on compliance data? No problem. Choose PC from the module picker. Then go to Reports > New > Compliance Report, and pick the report you're interested in.

Dynamic Tagging Using Azure Attributes

Create dynamic tag rules to tag your Azure virtual machines based on Azure metadata as collected by the Azure Connector. For each tag rule you'll provide a search query with Azure instance information.

It's easy to get started! 1) Click New Tag, 2) choose the Cloud Asset Search tag rule, 3) select the cloud provider, and 4) enter your query. Just start typing in the Query field and we'll show you the Azure attributes you can search.

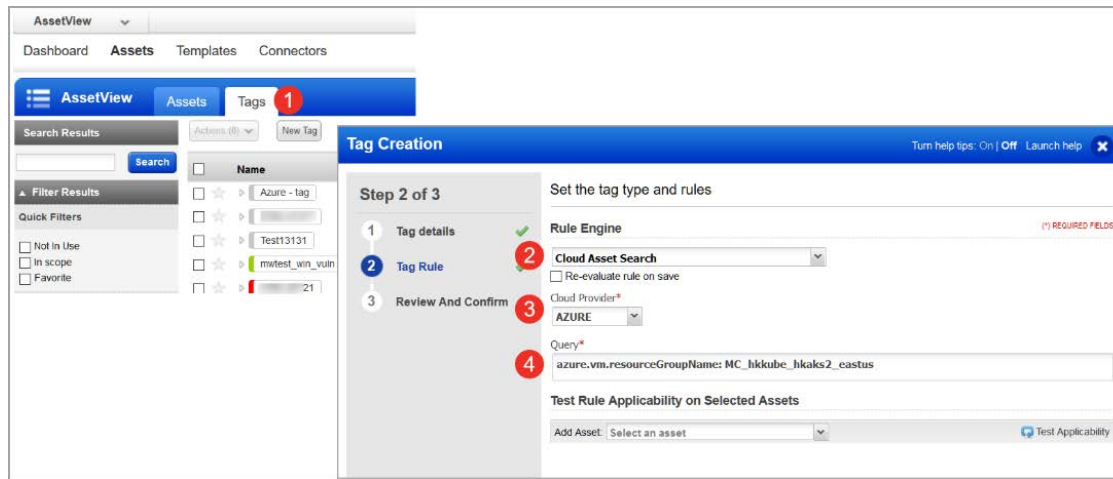

Sample queries

Find Azure virtual machines located in East US region: **azure.vm.location: eastus**

Find Azure virtual machines with specific group name: **azure.vm.resourceGroupName: MC_hkkube_hkaks2_eastus**

Find Azure virtual machines of standard size: **azure.vm.size: Standard***

Find Azure virtual machines based on IPs (comma-separated list or range):

azure.vm.publicIpAddress: [104.211.13.0 ... 104.211.13.255]

azure.vm.privateIpAddress: [10.95.0.0... 10.95.0.255]

Find Azure virtual machines for specific subscription ID: **azure.vm.subscriptionId: 1d767489-da0c-4948-a285-bf2c708c0586**


Find Azure virtual machines for specific tags: **azure.tags: (name: owner and value: amy)**

Manage Assets Using Qualys

Here's some best practices and tips for organizing assets to help you secure Azure infrastructure using Qualys.


Setting up Qualys Configurations

Asset Groups - Organize assets into meaningful groups and assign them to sub-users. Asset groups are required when you have multiple users i.e. Scanner, Reader, Unit Manager (if business units are defined). The same IP address can be included in multiple asset groups.

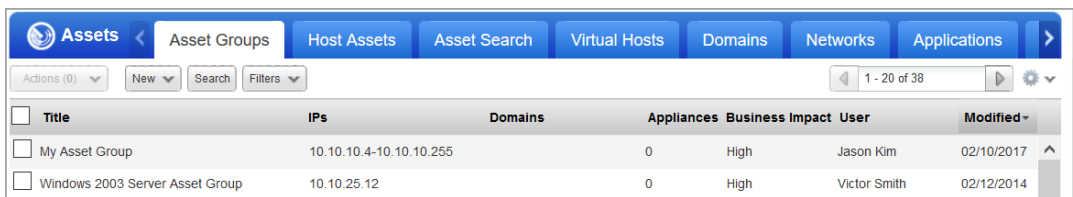


Title	IPs	Domains	Appliances	Business Impact	User	Modified
<input type="checkbox"/> My Asset Group	10.10.10.4-10.10.10.255		0	High	Jason Kim	02/10/2017
<input type="checkbox"/> Windows 2003 Server Asset Group	10.10.25.12		0	High	Victor Smith	02/12/2014

Business Units - Organize users and assets into business units in a way that matches your organization. This gives Managers the ability to grant users role-based permissions in the context of their assigned business unit. The same IP address can be included in multiple business units.

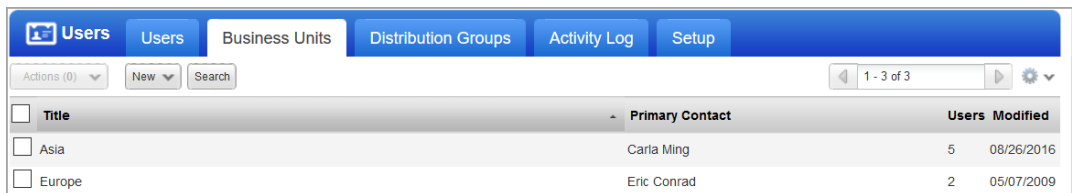

Title	Primary Contact	Users	Modified
<input type="checkbox"/> Asia	Carla Ming	5	08/26/2016
<input type="checkbox"/> Europe	Eric Conrad	2	05/07/2009

Networks - Organize discrete private IP networks to keep overlapping IP blocks separate. When configured Qualys tracks IPs by network and IP address. Keep in mind... An IP address must be unique to your subscription or a single network.

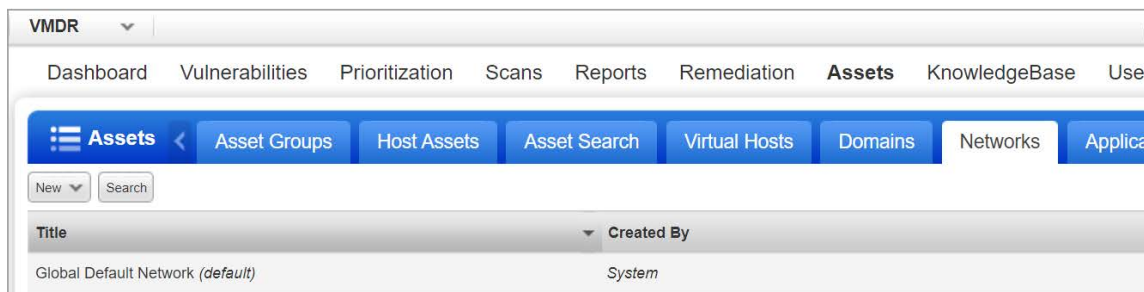

Title	Created By
Global Default Network (default)	System

Removing Terminated Virtual Machines- You can remove terminated virtual machines from your Qualys account. Go to VM/VMDR or Policy Compliance > Assets > Asset Search and select the assets with tracking method as IP address. You could also add more parameters to refine your search such as Last Scan Data not within x days and so on.

VMDR

Dashboard Vulnerabilities Prioritization Scans Reports Remediation **Assets** KnowledgeBase

Assets Asset Groups Host Assets Asset Search Virtual Hosts Domains Networks

Example: 192.168.0.87-192.168.0.92, 192.168.0.200

☐ Include asset group titles in results

With the following attributes

DNS Hostname: ☐ beginning with

EC2 Instance ID: ☐ beginning with

NetBIOS Hostname: ☐ beginning with

Tracking Method: ☒ IP address


EC2 Instance status: ☐ RUNNING

Operating System: ☐ beginning with [View](#)

Open Ports: ☐

Running Services: ☐ [Select](#)

Click Search and then select the assets from the results. From the Actions drop-down, select Purge. This results in removal of assets along with their associated data from the module.

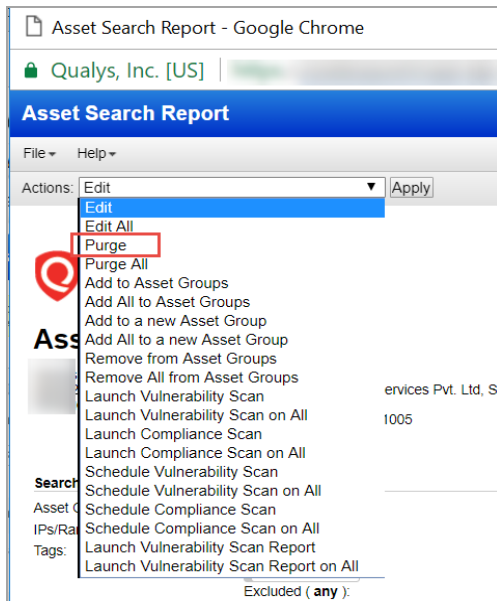

Uninstall agents

Consider a scenario where you have deployed cloud agents on your Azure assets and you want to uninstall agents not checked-in for last N days, you can use the API call.

Request:

```
curl -u "USERNAME:PASSWORD" -X "POST" -H "Content-Type: text/xml"
-H
"Cache-Control: no-cache" --data-binary
@uninstall_agents_not_checkedin.xml
"https://qualysapi.qualys.com/qps/rest/2.0/uninstall/am/asset/"
```

Contents of uninstall_agents_not_checkedin.xml:

```
<?xml version="1.0" encoding="UTF-8" ?>
<ServiceRequest>
<filters>
<Criteria field="tagName" operator="EQUALS">Cloud Agent</Criteria>
<Criteria field="updated" operator="LESSER">2016-08-
25T00:00:01Z</Criteria>
</filters>
</ServiceRequest>
```

For more information on Cloud Agent APIs, refer to our [Cloud Agent API User Guide](#).

Common Questions

Queries	Solutions
How to view platform provider info on virtual scanner appliances?	You'll see the platform provider info for a virtual scanner appliance that's been deployed in Azure (or another cloud platform) within your Qualys account. You'll see this info in the General Information section when you view or edit the appliance (from Scans > Appliances).
I have Azure connector available, but not able see Azure option in Cloud Perimeter scan.	To launch Cloud Perimeter scan for Azure VMs, make sure you have enabled 'Cloud Perimeter Azure VM scan' option for your Qualys account. To enable this option, reach out to Qualys support.
Troubleshooting connectivity	<p>Qualys Scanner Appliance must make regular connections to the Qualys Cloud Platform over HTTPS. Please be sure to resolve connectivity issues to ensure proper functioning of your appliance.</p> <p>The Communication Failure message appears if there is a network breakdown between the scanner and the Qualys Cloud Platform. The communication failure may be due to one of these reasons: the local network goes down, Internet connectivity is lost for some reason, or any of the network devices between the scanner and the Qualys Cloud Platform goes down.</p> <p>The Network Error message indicates the Scanner Appliance attempted to connect to the Qualys Cloud Platform and failed. You'll see an error code and description to help you with troubleshooting. Errors can be related to the proxy server and connection errors with Qualys Cloud Platform. The Qualys Cloud Platform logs results of connectivity checks and overall personalization process on the Azure System Console.</p> <p>If you see "No connectivity to qualysguard.qualys.com - please fix." messages, please verify that your VPN Network ACLs and Security Groups allow outbound HTTPS (TCP port 443) access. If you are using a proxy server, ensure that the scanner can reach the proxy server, and that the proxy server can access the Qualys cloud platform.</p>